



ELITE Owner's Manual

Marquis® | Las Vegas, NV

CONGRATULATIONS ON YOUR NEW ELITE HOT TUB!

We sincerely hope your spa life is a pleasant experience. If problems should arise, contact your authorized Marquis® Hot Tubs Dealer or by following the information listed below.

Email: serviceone@marquiscorp.com

Web: www.MarquisSpas.com

Marquis Corp Hot Tubs LLC

4720 N Lamb Blvd

Las Vegas, NV 89115

This manual is provided to enhance your safety and enjoyment of your spa and to prevent non-warranty situations. It is your sole responsibility to read, understand and comply with the instructions in the owner's manual. Please save your original sales receipt for reference in case of a future warranty claim. Failure to use, maintain or install the spa in compliance with this owner's manual could result in loss of warranty coverage.

SERIAL NUMBER LOCATION

You will find the serial number on the tag in the equipment area.

PLEASE FILL OUT AND KEEP FOR FUTURE REFERENCE

Name of Purchaser _____

Date of Purchase _____

Address _____

City _____ **State** _____ **Zip Code** _____

Telephone _____

Spa Model/Color _____

Spa Serial # _____

Pack Serial # _____

Dealer's Name _____

Dealer's Address _____

City _____ **State** _____ **Zip Code** _____

Telephone _____

Every effort has been made to ensure the accuracy of this manual. However, Marquis Hot Tubs, LLC and reserves the right to improve its product without notice. This could create a minor variation between this manual and the actual product you receive. We apologize for any inconvenience this may cause.

IMPORTANT SAFETY INSTRUCTIONS
Table of Contents

CONGRATULATIONS ON YOUR NEW ELITE HOT TUB!	1
SERIAL NUMBER LOCATION.....	1
PLEASE FILL OUT AND KEEP FOR FUTURE REFERENCE.....	1
IMPORTANT SAFETY INSTRUCTIONS	2
4.240 VOLT, PERMANENTLY INSTALLED OR CONVERTED	
ALL SPA MODELS.....	6
SHUT-OFF VALVES	12
FREEZE PROTECTION	12
FILTER CARTRIDGES.....	12
SUCTION GUARDS.....	13
ELECTRICAL REQUIREMENTS	14
STARTUP PROCEDURE.....	16
THERAPY PUMP(S).....	16
SPA COVER	18
OPERATING THE ELECTRONIC CONTROLS.....	19
USER PROGRAMMING.....	20
MOTOWN AUDIO SYSTEM.....	28
PUMP 1.....	33
Broadway Elite 1 Pump Model	38
PUMP 1.....	38
Broadway Elite 2 Pump Model.....	38
PUMP 1.....	38
BROADWAY ELITE EQUIPMENT 2 PUMP	47
NASHVILLE ELITE EQUIPMENT	48
MONACO ELITE EQUIPMENT.....	49
EQUIPMENT WILL NOT OPERATE	50
INADEQUATE JET ACTION	50
NO HEAT.....	50
LIGHT DOES NOT WORK.....	50
LCD DIAGNOSTIC MESSAGES	50
HOW TO PROLONG THE LIFE OF YOUR HOT TUB	52
WEEKLY MAINTENANCE.....	52
MONTHLY MAINTENANCE	53
EVERY THREE TO FOUR MONTHS	53
AS NEEDED MAINTENANCE	55
VACATION CARE INSTRUCTIONS	56
IMPORTANT CHEMICAL SAFETY PROCEDURES.....	57
WATER CARE	57
UNDERSTANDING WATER BALANCE	58
BALANCE	59
SHOCK	59
SANITIZE.....	60
BUILT-IN SANITATION SYSTEM*	60
ADJUST THE MINERAL CARTRIDGE.....	60
ADJUST THE BROMINE OR CHLORINE CARTRIDGE	60

IN-LINE SANITATION SYSTEM.....	50
REMOVE THE CARTRIDGES.....	50
WATER CARE REGIMEN	50
WATER CARE TROUBLESHOOTING GUIDE	51
WATER CARE TROUBLESHOOTING GUIDE.....	52
MARQUIS ELITE STEP & BENCH INSTALLATION (OPTION)....	54

SAFETY INSTRUCTIONS

The following instructions contain important safety information. We strongly encourage you to read and apply them.

IMPORTANT SAFETY INFORMATION! READ, FOLLOW, AND SAVE THESE INSTRUCTIONS!

THIS PRODUCT SHALL BE INSTALLED IN
ACCORDANCE WITH ALL LOCAL CODES

THIS PRODUCT SHALL BE SECURED TO PROTECT
AGAINST UNAUTHORIZED ACCESS PER LOCAL
CODES

WHEN INSTALLING AND USING THIS ELECTRICAL
EQUIPMENT, THESE BASIC SAFETY PRECAUTIONS
SHOULD ALWAYS BE FOLLOWED!

1. **WARNING:** To reduce the risk of injury, do not permit children to use this product unless closely supervised at all times.
2. **DANGER: RISK OF ACCIDENTAL DROWNING.** Extreme caution must be exercised to prevent unauthorized access by children. To avoid accidents, ensure that children cannot use the spa or hot tub unless they are supervised at all times. Be sure to close and lock the cover after each use.

120 VOLT, GFCI CORD CONNECTED MODELS

3. **DANGER: RISK OF INJURY.** Connect only to a grounded source.
4. Do not bury the power cord.
5. **WARNING:** To reduce the risk of electric shock, replace the damaged cord immediately.
6. **WARNING:** 120 Volt Cord GFCI Connected Units. Your spa may be equipped with a Ground Fault Circuit Interrupter (GFCI) at the end of the power supply cord. Before each use of the spa, with the plug connected to the power supply and the unit operating, press the "test" button. The unit should stop operating and the GFCI power indicator will go out. Wait thirty seconds and then reset the GFCI by pressing the "Reset" button. The GFCI power indicator will turn on, restoring power to the spa. If the interrupter does not perform in this manner, it is an indication of an

SAFETY INSTRUCTIONS

electrical malfunction and the possibility of an electric shock. Disconnect the plug from the receptacle until the fault has been identified and corrected

240 VOLT, PERMANENTLY INSTALLED OR CONVERTED MODELS

7. A ground terminal is provided on the control box located in the equipment bay of the spa. To reduce the risk of electric shock, connect this terminal to the grounding terminal of your electrical service or supply panel with a continuous green, insulated copper wire. The wire must be equivalent in size to the circuit conductors supplying the equipment. In addition a bonding terminal (pressure wire connector) is provided on the outside of the control box for bonding to local ground points. **To reduce the risk of electric shock, this connector should be bonded with a No. 8 AWG (8.42mm²) (No. 6 AWG in Canada) solid copper wire to any metal ladders, water pipes, or other metal within five feet (1.52m) of the spa to comply with local requirements.** If the spa is located on a reinforced concrete pad, the reinforcing steel should also be bonded to the ground terminal.

8. Your spa requires a ground fault circuit interrupters in the electrical sub-panel. Before each use of the spa and with the unit operating press the "Test" button on each the breaker. The breaker should click over to the "Trip." position. Wait thirty seconds and reset the GFCI breaker by switching it completely off and then completely on. The switch should then stay on. If either of the interrupters does not perform in this manner, it is an indication of an electrical malfunction and the possibility of an electric shock. Disconnect the power until the fault has been identified and corrected.

ALL SPA MODELS

- Install the spa so proper drainage is provided.
- **DANGER: RISK OF ELECTRIC SHOCK.** Install the spa at least five feet (1.52m) away from metal surfaces. As an alternative, a spa may be installed within 5 feet of metal surfaces if each metal surface is permanently connected by a minimum 8 AWG (8.4mm²) solid copper conductor to the wire connector on the terminal box that is provided for this purpose.
- **DANGER: RISK OF ELECTRIC SHOCK.** Do not permit any appliance, such as a light, telephone, radio, or television, etc. within five feet (1.52m) of the spa or hot tub.
- **WARNING:** To reduce the risk of injury:
- The water in the spa should never exceed 40°C (104°F). Water temperatures between 100°F (38°C) and 104°F (40°C) are considered safe for a healthy adult. Lower water temperatures are recommended for young children and when spa use exceeds 10 minutes.
- Since excessive water temperatures have a high potential for causing fetal damage during the early months of pregnancy, pregnant or possibly pregnant women should limit spa water temperatures to 38°C (100°F).
- Before entering a spa, the user should measure the water temperature since the tolerance of water temperature-regulating devices varies.
- The use of drugs, alcohol, or medication before or during spa use may lead to unconsciousness with the possibility of drowning.
- Obese persons and persons with a history of heart disease, low or high blood pressure, circulatory system problems, or diabetes should consult a physician before using the spa.
- Persons using medications should consult a physician before using a spa since some medication may induce drowsiness while other medication may affect heart rate, blood pressure, and circulation.
- **DANGER: TO REDUCE THE RISK OF INJURY TO PERSONS.** Do not remove the suction fittings.
- **DANGER: RISK OF INJURY:** Never operate a spa if the suction guard(s) is broken or missing. Never replace a suction guard with one rated less than the flow rate marked on the original suction guard. The suction guard(s) in the spa are sized to match the specific water flow created by the pump. Should the need arise to replace the suction guard(s) or the pump, be sure that the flow rates are compatible.
- **DANGER:** Children are especially sensitive to hot water. At no time should children have unsupervised access to the spa. Children must not be allowed to climb onto the spa cover. All hot tubs are equipped with a locking cover that meets the ASTM F1346-91 Standard for Safety Covers. Always lock the child resistant locks after using the spa for your children's safety.

SAVE THESE INSTRUCTIONS.

- **WARNING:** Do not permit electric appliances (such as a light, telephone, radio, or television) within five feet (1.52m) of the spa or hot tub.
- **WARNING:** Children should not use spas or hot tubs without adult supervision.

SAFETY INSTRUCTIONS

- WARNING:** Do not use spas or hot tubs unless all suction guard(s) are installed to prevent body and hair entrapment.
- WARNING:** Do not use drugs or alcohol before or during the use of a spa or hot tub to avoid unconsciousness and possible drowning.
- WARNING:** People using medications and/or having an adverse medical history should consult a physician before using a spa.
- WARNING:** The use of alcohol, drugs, and medication can greatly increase the risk of fatal hyperthermia.
- WARNING:** Before entering the spa or hot tub, measure the water temperature with an accurate thermometer.
- WARNING:** Water temperature in excess of 104°F (40°C) may be injurious to your health.
- WARNING:** Prolonged immersion in a spa or hot tub may be injurious to your health.
- WARNING:** People with infectious diseases should not use a spa.
- WARNING:** Pregnant or possibly pregnant women should consult a physician before using a spa or hot tub.
- WARNING:** To avoid injury, exercise when entering and exiting the spa or hot tub.
- WARNING:** Do not use a spa or hot tub immediately following strenuous exercise.
- WARNING:** Maintain water chemistry in accordance with manufacturer's instructions.
- SAFETY INSTRUCTIONS FOR FRENCH SPEAKING SPA OWNERS**
- AVERTISSEMENT:** Ne pas placer d'appareil électrique (luminaire, téléphone, radio, téléviseur, etc.) moins de 1.52 m de cette cuve de relaxation. **AVERTISSEMENT:** Ne pas laisser les enfants utiliser une cuve de relaxation sans surveillance.
- AVERTISSEMENT:** Pour éviter que les cheveux ou une partie du corps puissent être aspirés, ne pas utiliser une cuve de relaxation si les grilles de prise d'aspiration ne sont pas toutes en place.
- AVERTISSEMENT:** Pour éviter l'évanouissement et la noyade éventuelle, ne prendre ni drogue ni alcool avant d'utiliser une cuve de relaxation ni quand on s'y trouve.
- AVERTISSEMENT:** Les personnes qui prennent des médicaments ou ont des problèmes de santé devraient consulter un médecin avant d'utiliser une cuve de relaxation.
- AVERTISSEMENT:** La consommation d'alcool ou de drogue augmente considérablement les risques d'hyperthermie mortelle dans une cuve de relaxation.
- AVERTISSEMENT:** Avant d'utiliser une cuve de relaxation mesurer la température de l'eau l'aide d'un thermomètre précis.
- AVERTISSEMENT:** Il peut être dangereux pour la santé de se plonger dans de l'eau plus de 40°C.
- AVERTISSEMENT:** L'utilisation prolongée d'une cuve de relaxation peut être dangereuse pour la santé.
- AVERTISSEMENT:** Les personnes atteintes de maladies infectieuses ne devraient pas utiliser une cuve de relaxation.
- AVERTISSEMENT:** Les femmes enceintes, que leur grossesse soit confirmée ou non, devraient consulter un médecin avant d'utiliser une cuve de relaxation.
- AVERTISSEMENT:** Pour éviter des blessures, user de prudence en entrant dans une cuve de relaxation et en sortant.
- AVERTISSEMENT:** Ne pas utiliser une cuve de relaxation immédiatement après un exercice fatigant.

SAFETY INSTRUCTIONS

ATTENTION: La tenteur de l'eau en matières dissoutes doit être conforme aux directives du fabricant.

PERSONAL SAFETY

- **WARNING:** Risk of Fatal Hyperthermia. Hyperthermia occurs when the internal temperature of the body reaches a level several degrees above the normal body temperature of 98.6°F (37°C). The symptoms of Hyperthermia include dizziness, lethargy, drowsiness, and fainting. The effects of Hyperthermia can also include:
 - Unawareness of impending hazard and failure to perceive heat
 - Failure to recognize the need to exit the spa
 - Physical inability to exit the spa; unconsciousness and danger of drowning
 - Fetal damage in pregnant women
 - **WARNING:** The use of alcohol, drugs, and/or medication can greatly increase the risk of fatal Hyperthermia.
- Other booklets about spa safety are: "Children Aren't Waterproof," "Pool and Spa Emergency Procedures for Infants and Children," "Layers of Protection" and "The Sensible Way to Enjoy Your Spa" published by Association of Pool & Spa Professionals.

WARNING: Risk of Fatal Hypothermia. Hypothermia occurs when the internal temperature of the body reaches a level several degrees below the normal body temperature of 98.6°F (37°C). The symptoms of Hypothermia include but are not limited to shivering, slurred speech or mumbling, slow, shallow breathing, weak pulse, clumsiness, drowsiness, confusion, unconsciousness, and bright red cold skin (in infants). The effects of Hypothermia include failure of the nervous system, respiratory system and heart and can also include:

Unawareness of impending hazard and failure to perceive heat

Failure to recognize the need to exit the spa; unawareness of impending hazard

Fetal damage in pregnant women; physical inability to exit the spa and unconsciousness and danger of drowning

WARNING: The use of alcohol, drugs, and/or medication can greatly increase the risk of fatal Hypothermia

People taking medications which induce drowsiness such as tranquilizers, antihistamines, or anticoagulants should not use the spa. Pregnant women and persons with a medical history of heart disease, diabetes, or high blood pressure should consult a physician before using the spa.

PERSONAL SAFETY DOS:

- Be sure your spa is connected to the power supply correctly only use a licensed electrical contractor.
- Shut off power supply (unplug 120V models) before draining the spa or servicing the electrical components.
- Test the Ground Fault Circuit Interrupter (GFCI) monthly.
- Always test the water temperature with an accurate thermometer before entering the spa to be sure that it's a safe temperature.

SAFETY INSTRUCTIONS

- Do not use the spa if water temperature is outside of set temperature. Remember that wet surfaces can be very slippery. Take care when entering and exiting the spa.
- Lock the cover when the spa is not in use, whether it is empty or full of water.
- Keep the water clean and sanitized with correct chemical care.
- Turn on the jets when adding ANY chemicals to the spa water.
- Clean the filter cartridge(s) monthly to remove debris and mineral buildup which affects the performance of the hydrotherapy jets, limits the flow, or trips the high limit thermostat which will turn off the entire spa.

PERSONAL SAFETY DO NOTs:

- Don't use the spa with the equipment compartment door removed.
- Don't use the spa for more than 10 minutes at water temperatures in excess of 102°F (39°C).
- Don't allow the jet pump(s) to operate for an extended period of time with the cover in place. Extended pump operation causes a slow heat buildup due to water friction. The spa equipment controls are equipped with a built-in safety timer that automatically shuts off the jet pump(s) after 15 minutes of continuous operation should it have been left on inadvertently.
- Don't operate the spa at any time with the filter cartridges removed.
- Don't lift or drag the cover by using the tie-down straps; always lift and carry by using the external handles.
- Don't store chemicals in the spa's equipment compartment.
- Don't hesitate to call your authorized dealer to ask any questions or maintenance concerns.
- For your portable spa to function properly and safely, it must be located on a hard, flat, level surface. Inground spas require special installation techniques and should be planned in conjunction with your authorized Celebrity Hot Tubs dealer. Improper installation can result in structural damage to the spa and the voiding of your spa warranty. Items to discuss with your dealer include Local construction codes, electrical service requirements, serviceability of equipment present underground obstructions such as gas, water, and telephone lines, safety measures such as fences and locks, and visibility of the spa installation from the home, street, and neighbors.
- Do not shim your spa. If your pad is not level, you must pour a top cap: contact a professional.

Allow for sufficient water drainage around the spa to help preserve the equipment and support structure. This includes indoor installations.

A filled spa with users can be substantial. Seek guidance from a qualified contractor or engineer before placing, connecting, and using the unit.

Locate the equipment compartment where it will be accessible. Your spa **MUST** be installed to permit access for servicing the equipment above and/or below any decks or floors. Access is essential and must allow adequate room for service. To facilitate repairs, Celebrity Hot Tubs or its agent may require access to spa equipment. It is your responsibility to provide unencumbered access. See spa diagrams for location of power supply.

Leave access to the circuit breakers in the sub panel (240V models) or to the interrupter switch (GFCI, 120V models) at the end of the power cord.

Be sure the spa is level and in the final position **BEFORE** filling with water. Check for power cords, tools, and hoses that may be caught underneath the spa. Do not apply power to the spa before it is completely filled with water. Damage to the pumps, heater and sensors may result.

Spa surface temperatures can reach in excess of 180°F (82°C) if left exposed to the sun. Significant damage can occur if this is allowed to happen, including warping and blistering of the surface. Damage that occurs as a result of this exposure is not covered under the warranty.

CAUTION: Never try to move a spa that has not been fully drained. Doing so could result in damage to the spa and physical injury to the mover. Cracks in the spa surface, exterior siding or base due to improper transport or support of the spa are not covered under the warranty.

OUTDOOR AND PATIO INSTALLATION

To install the spa outdoors, we recommend a reinforced concrete pad at least four inches thick. The reinforcing material should be attached to a #8 AWG bonding wire (#6 AWG in Canada) per national and local electrical code.

If you place the spa on the ground, even temporarily, place the spa empty of water on concrete pavers under the entire bottom of the spa. The concrete pavers should be at least two inches thick and level across the entire surface. The spa will inevitably settle and not remain level on this surface, thus it's important to get the spa onto a solid foundation as soon as possible.

INSTRUCTIONS FOR PREFABRICATED SPA PADS

If you are using a prefabricated spa pad for a foundation, please use the following guidelines:

Designate the area where the spa is to be installed. Please make sure the ground is flat and level.

Using 2"x 6" (51mm - 152mm) weather resistant lumber and 3" (76mm) outdoor deck screws, build a frame large enough for the prefabricated spa pad to fit inside with minimum 1" (25mm) clearance on all sides.

Install the frame in the area that has been leveled.

Using crushed gravel, fill the frame to the top.

Lay a straight piece of lumber across the frame and level any high spots in the gravel by pushing the straight lumber across the frame. Fill in any low areas with more gravel and re-level using the straight piece of lumber.

Compact the gravel to make the surface hard and flat. You may need to add more gravel to bring the level back up to the top of the frame. If so, please relevel and recompact until you have a hard, flat level surface that is even with the top of the frame.

Place the prefabricated spa pad on top of the gravel. Please be careful not to disturb the hard, flat, level surface.

Please make sure no portion of the spa pad is sitting outside or on top of the framing.

Place the spa on top of the pad and fill the spa with water.

DECK INSTALLATION

Be sure the deck can support the weight of your filled spa by checking the deck's maximum capacity. Consult a qualified building contractor or structural engineer to determine adequacy of the deck to support the specific product you have purchased.


INDOOR INSTALLATION

There are special requirements if you place your spa indoors. Flooring material must provide adequate traction when wet. Proper drainage is essential to prevent water puddling. For spa/hot tubs installed indoors, care should be taken to ensure adequate ventilation for the indoor space, to avoid undesired build of humidity due to spa water. For additional information on ventilation/humidity guidelines see the ASHRAE Handbook, HVAC Applications, I-P Edition, 4.5,4.6, and 4.7.)

Please see your contractor for details.

WARNING: This appliance is not intended for use by young children or unhealthy people without supervision.

Included with the spa is a warning sign to inform users and guests of the risks involved with using a spa. This sign is suitable for indoor and outdoor use. It should be placed in a visually noticeable location adjacent to the spa. For free additional or replacement copies, contact your authorized Marquis Hot Tub Dealer.

 WARNING ^a
REDUCE THE RISK OF ELECTROCUTION ^b 1. Never place an electric appliance within 5 feet of spa. ^c
REDUCE THE RISK OF CHILD DROWNING ^b 1. Supervise children at all times. ^c 2. Attach spa cover after each use. ^c
REDUCE THE RISK OF OVERHEATING and EFFECTS OF COLD WATER IMMERSION ^b 1. Check with a doctor before use if pregnant, diabetic, in poor health, or under medical care. ^c 2. Exit immediately if uncomfortable, dizzy, shivering, or sleepy. Spa heat can cause hyperthermia and unconsciousness. Sudden or Prolonged exposure to cold water immersion can cause hypothermia and related injuries. ^c 3. Spa heat or immersion in cold water in conjunction with alcohol, drugs, or medication can cause unconsciousness. ^c
WHEN PREGNANT, ^b soaking in hot/cold water for long periods can harm your fetus. Measure water temperature before entering. ^c 1. Do not enter spa if water is hotter than 100° F (38° C). ^c 2. Do not stay in spa for longer than 10 minutes. ^c

INSTALLATION INSTRUCTIONS



Shut-off valve in open position

SHUT-OFF VALVES

Your spa is equipped with shut-off valves (see EQUIPMENT DIAGRAM) that shut off the water flow to the equipment system for authorized Marquis Elite Hot Tubs dealer service. At times, a new spa or one that has recently been serviced may have the shut-off valves partially closed which can restrict the water flow and hinder jet performance. Be sure the valves are fully open.

FREEZE PROTECTION

When a freeze condition is detected (which occurs when the temperature in the heater housing drops to 55°F, (13°C) the jet pump(s) is automatically activated. Pump two and/or MicroSilk pump (if so equipped) will cycle when in freeze protection. In areas with extremely cold winter conditions, your spa should be fine as long as it is left running at normal operating temperatures. For extra protection see your dealer for an optional freeze sensor. If you plan to turn the spa off, follow the instructions in this manual (see SUSPENDED USE OR WINTERIZING YOUR SPA).

OVERHEATING

In the case of extended hot weather, the spa water temperature may reach and maintain 104°F to 106°F (40°C to 41°C) or higher. This is due to the ambient temperature and the optional full insulation in the spa cabinet (Marquis Elite Models). You have the option of shortening the filtration time. See SPA CONTROL OPERATION for available options.

FILTER CARTRIDGES

Your portable spa is equipped with the Constant-Clean™ Filtration system. It features one filter, 50 sq ft in Marquis Elite.

Removal and Installation

1. Remove cap or cover by lifting straight up while holding the perimeter with your hands.
2. To remove the filter, find the raised bar on the top of the filter and turn counterclockwise.
3. To reinstall, slowly insert the filter, threads down, into the skimmer. Using the raised bar on the top of the filter, slowly turn clockwise until it's snug. Do not overtighten as this may strip or break the threads of the filter cartridge.
4. Reinstall cap or cover on skimmer top.

INSTALLATION INSTRUCTIONS



Safety guard of suction fitting must remain in place.

NOTE: It is very important that the components of these filtration systems be installed properly in the proper part of the spa.

SUCTION GUARDS

The suction guard(s) in the footwell of your spa is an opening through which the jet pump(s) draws water. The suction fittings have an integrated vacuum release built into them. In the event that a suction fitting gets blocked, air will be induced causing the pump to cavitate and the water flow interrupted. Once the blockage is removed, normal operation will resume. Suction fittings are equipped with a safety guard.

Suction through the fittings can be strong. The safety guard(s) must remain in place and undamaged. A fitting with a damaged guard(s) can be dangerous, especially to small children or people with long hair. Should any part of the body become drawn to a fitting, turn the jet pump(s) off immediately. Long hair should be restrained. Never allow long hair to float freely in the spa. Replace any missing or damaged suction guard(s).

NOTE: It is normal for the flow rates of the suction fittings to vary from strong to barely noticeable.

STARTING YOUR SPA

Improperly wired spas are beyond Marquis Elite Hot Tubs control and are not covered under the warranty. Other items beyond Marquis Elite Hot Tubs control include, but are not limited to, damage resulting from: improper connections; accidents; failure to follow procedures and instructions defined in the Marquis Elite Hot Tubs printed instructions; cleaning agents; and natural occurrences including but not limited to rodent or insect infestation, mold, lightning and other acts of nature.

ELECTRICAL REQUIREMENTS


It is the responsibility of the spa owner to ensure that all electrical connections are made by a qualified electrician in accordance with all national, state, and local electrical codes in effect at the time of installation. Fuses are covered to be free of defect at time of installation only.

240 Volt

All connections must be made in accordance with the wiring diagram found on the inside of the control box cover. **Connections must be made with copper conductors only – do NOT use aluminum wire.** All conductors, circuit breakers, and fuses and the GFCI must be sized in accordance to the total amperage load as specified below. Wiring diagram is located on the back of the cover on the equipment enclosure.

Improperly wired spas can cause irreversible damage resulting in a blown fuse and melted terminal block, and to other electrical components. Also, damage caused to components or equipment caused by high or low voltage, brown outs or electric surges is not covered under warranty.

- Permanently connected (Hard wired).
- Rated 240V, 60Hz, 50A, three wires (#6 copper) plus ground (#8 copper (8.42mm²)), [4 wires total].
- Circuit breaker or fuse size: 50A.
- A disconnecting means must be installed within sight from the equipment and at least 5 feet (1.52m) from the inside walls of the spa.
- Connect only to a circuit protected by a Class A ground Fault Circuit Interrupter (GFCI).

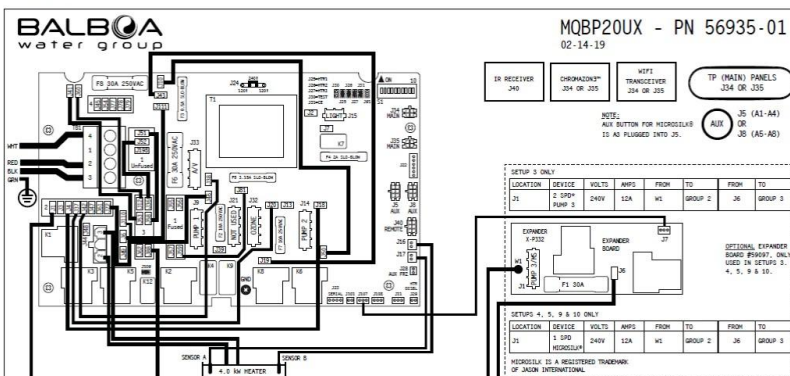Wiring Diagram


STARTING YOUR SPA

120 Volt


120 Volt spas shall be plugged into a properly grounded, grounding type 15 Amp receptacle on a dedicated circuit. A dedicated circuit is a circuit with no other components that consume power, such as lights, televisions, radios, computers, or other electronic devices. These could cause your spa to malfunction by any of the following: unusual text on the control panel, slow heating, poor jet action, tripping house breaker, or blown fuses. Failure to follow these instructions could lead to premature failure of spa components that would not be covered under the warranty. The dedicated circuit shall meet the following specifications:

- Rated 120V, 60Hz, 15A (2 wires plus ground)
- Circuit breaker or fuse size: 15A
- The receptacle must be at least 5 feet (1.52 m) from the spa.
- The 15-foot GFCI power cord provided with the spa must be plugged directly into the receptacle. Do NOT use an extension cord or any other adaptor. Actual exposed length of cord will vary by model but will never be less than 12 feet.

Convert 120 Volt to 240 Volt

120 Volt spas may be converted to operate on 240V, 50A. Wiring must be performed by a licensed electrician in accordance with the NEC and any local or regional electric codes.

1. Disconnect the power: Unplug GFCI cord from wall receptacle. Disconnect cord end from terminal block and ground bar inside equipment box.
2. Move white jumpers on J24 to connect the two middle pins only. Failure to do this will result in a blown transformer.
3. For 50-amp operation Move dip switch #2 up to the on position. This will allow the heater to operate on pump 1 high speed. Install 240V power as indicated on the 240V section.
4. Remove the jumper wire connecting J61 to J79 and discard.
5. Reconnect the spa with 240V power to approved GFCI and exterior mounted disconnect.

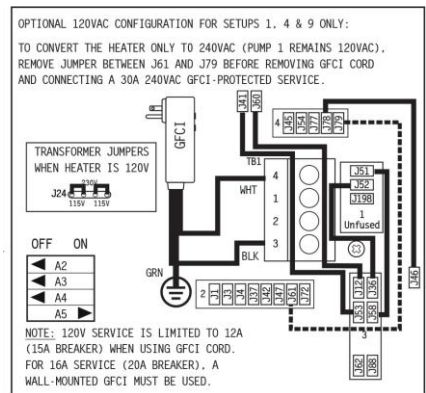

Improperly wired spas are beyond Marquis Corp. control and are not covered under the warranty. Other items beyond Marquis Corp. control include, but are not limited to, damage resulting from: improper connections; accidents; failure to follow procedures and instructions defined in the Marquis® printed instructions; cleaning agents; and natural occurrences including but not limited to rodent or insect infestation, mold, lightning and other acts of nature.

STARTUP PROCEDURE

Your spa is equipped with solid-state controls specific to your spa model. (See SPA CONTROL OPERATION for your specific spa model.)

To start your spa, you need spa test strips. It is important to follow each of these steps when starting your spa. Once you have completed the following steps, see SPA CARE AND ENJOYMENT GUIDE for proper water treatment.

NOTE: Your spa has been filled and test-run at the factory. The first time your spa is filled with water, some discoloration from residual test water may appear. This will disappear when the spa is completely filled and the filtration system is functioning.

WARNING: Spa must be completely filled with water 2/3 the way up the skimmer before turning on power.

Test the water for the proper chemical balance and adjust as necessary. Marquis Water Care products are recommended. (See WATER TREATMENT.)

PROPER CHEMICAL BALANCE IS IMPORTANT for your safety and the longevity of your spa.

In the case of relocating your spa, it is imperative to follow the instructions in the owner's manual. These instructions must remain with the spa. Damage caused by relocating spa is not covered under warranty.

THERAPY PUMP(S)

Allow the spa to circulate on high-speed (see **SPA CONTROL OPERATION**) for four to five minutes to discharge air from the plumbing system. Do not expect hot water immediately from the jets; the heater will take several hours to heat the water.



Vent air by slightly opening pump unions.

Startup procedure for all models

1. Place spa on a hard, flat, level surface. Make sure the power supply is off.
2. Make sure the suction guard(s) in the footwell are in place and undamaged.
3. Open the equipment door. Tighten all fittings and open all shut-off valves. Tighten the pump plug(s) from the pump(s). (See EQUIPMENT DIAGRAM.)

NOTE: Keep the drain valve closed at all times except when draining the spa (do not rely on the cap to stop the flow of water). Not doing so could result in damage to the drain valve due to freezing water. Install filter cartridges. (See INSTALLATION INSTRUCTIONS, Filter Cartridges, page 1

STARTING YOUR SPA

4. Fill the spa with water to two-thirds of the way up the skimmer openings. The use of a *Fill Filter* is recommended, especially in areas with high mineral content in the water.
5. Turn the power on.
6. Your spa is now in “pump priming” mode and a “RUN PMPS PUR AIR” message displays in the LCD window of the control panel. While in this mode the spa appears idle, which lasts approximately four to five minutes if not exited manually. To exit manually, press the TEMP pad.
7. Allow the spa to circulate on high-speed (see SPA CONTROL OPERATION) for four to five minutes to discharge air from the plumbing system. Do not expect hot water immediately from the jets; the heater will take several hours to heat the water.
8. At this time the spa should have water flowing from the jets. If the pump has not primed and the water is not flowing from the jets after two minutes TURN OFF POWER TO THE SPA and vent air from the pumps by slightly opening the pump unions. After turning the power on again, the spa initiates a new priming mode. Repeat steps above.
9. The system requires approximately two minutes of water flow to determine the water temperature. After two minutes of water flow, the temperature is displayed as actual water temperature. After you have manually exited the priming mode (or allowed the spa to automatically exit) the LCD window momentarily displays 100°F (38°C) and then the display switches to -- °F.
10. The factory default setting for water temperature is 100°F (38°C). Use the TEMP pad on the control panel to set the water temperature to the desired level. (See SPA CONTROL OPERATION.) It takes up to 24 hours to heat the water to desired temperature depending on the water temperature and voltage of your spa.
11. If water is not coming out of the jets, check to make sure the adjustable jets are open. Simply turn the jet face to open or close the jets.

SPA COVER

When the spa is not in use, the cover should be kept on the spa to retain the water's heat and to keep out dirt, leaves, etc.

For your safety and convenience, the cover is equipped with straps, safety locks, and handles. Use the exterior handles to remove and replace your cover. Never attempt to open or remove the cover by grasping or pulling on the cover skirting or cover lock straps as the skirting will tear.

We suggest you use the safety locks to help keep out unintended users, prevent covers from being blown off in windy conditions and to maximize heat retention/energy efficiency. The cover and retractable cover system are not recommended for use in wind conditions reaching above 25 miles per hour. If your spa is located in an area susceptible to high winds, additional Wind Straps may be necessary to minimize cover damage.

NOTE: The cover is designed for optimum protection of the spa shell. Using an aftermarket cover will not provide the same protection and will void the shell warranty.

Open the spa cover:

1. Unfasten all cover lock straps.
2. Place one hand under the cover skirting, between the spa and cover, to break the cover's vacuum seal. Do not use cover handles to break vacuum seal.
3. Fold the front half of the cover over onto the back half.

NOTE: Unlock and release all cover locks before attempting to open cover. Damage caused by attempting to open the cover while locked or by wind is not covered under warranty. Do not walk, stand, climb, or sit on the vinyl cover or retractable cover system. Do not use hard, sharp, or metal objects, such as a windshield scraper, to remove ice. Such objects can cut, mar, or puncture the cover's vinyl surface.

Close the spa cover:

1. Slide folded cover onto one half of spa.
2. Unfold the cover by lifting the handle located on the top (front) half of the cover. Allow the unfolded half to gently fall down onto the spa.
3. Secure the cover lock straps to the spa and lock them.

NOTE: When opening a cover with a cover removal mechanism, use one of the manufacturer's recommended methods. Do not attempt to open the cover in any other way. Damage caused by improper opening or closing of the cover is not covered under the warranty. Fading, staining, torn stitching of the spa cover and broken foam cores are not covered under the warranty for any reason. Spa covers do not qualify for labor coverage under the warranty. These parts can be purchased or exchanged under warranty at your authorized Marquis Elite Hot Tubs dealer.

SPA CONTROL OPERATION OPERATING THE ELECTRONIC CONTROLS

Marquis Elite Control Panel



Marquis Elite Control Panel V2




SPA CONTROL OPERATION

THE MAIN SCREEN

Main Screen

A
B
C
D
E
F
G
H
I
O
N
M
L
J
K

Main Screen

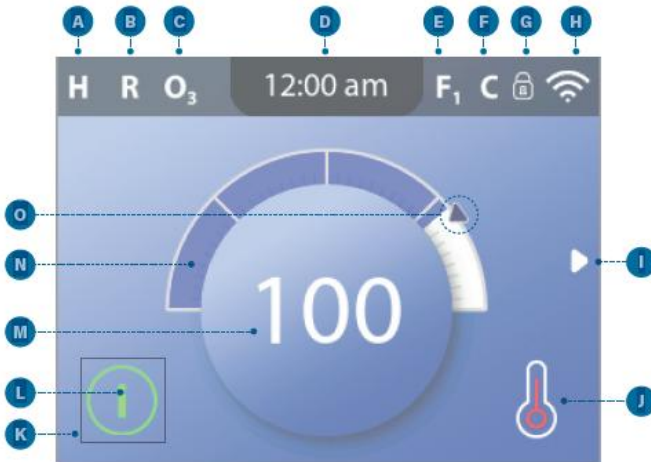

SPA CONTROL OPERATION




Spa Device Buttons

These buttons control various spa devices, such as Jets, Lights and Soak.

Navigation Buttons

Navigate the entire menu structure with the 5 navigation buttons on the control panel. The names shown to the right refer to the navigation buttons. The names will be written in uppercase letters.

Operating or changing a selected item on the panel screen is generally done with the SELECT button (center button).



Selection Box


The Select Button is a fundamental navigation tool. It indicates a selected item. Move the selection box by pressing the UP, DOWN, LEFT, RIGHT Navigation buttons. When an item is selected, press the SELECT navigation button to act upon the selected item. The next page shows various examples of selected items (C, I, L).

Menu Navigation

The right Navigation arrow (A) on the Main screen indicates a menu. Press the RIGHT navigation button to enter that menu.

A selection box (C) indicates that a menu item is selected. When a menu item is selected, its name appears at the top of the screen (B). In this example the Settings menu is selected. Press the SELECT navigation button to enter the Settings window (E).

SPA CONTROL OPERATION

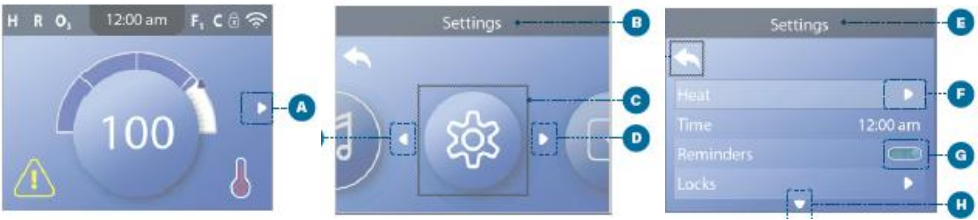


Navigation Arrows

Navigation arrows (D, F, H, M) indicate more menu items. Each navigation arrow corresponds to a navigation button. For example, the right Navigation arrow (D) corresponds to the RIGHT navigation button. The left Navigation arrow corresponds to the LEFT navigation button, etc.


Back Button

Use the Back button (L) to navigate back in the menus. Use the navigation buttons to select the Back button. The Selection box (L) indicates that the Back button is selected. Press the SELECT navigation button.



On/Off Switches

In this example the Reminders setting has an On/ Off switch (G). When the Reminders setting line is selected, press the SELECT navigation button to turn the switch On/Off. In this example the switch is On (G)

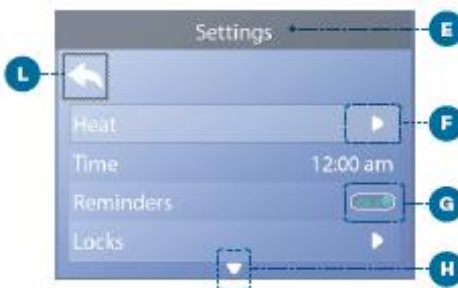

SPA CONTROL OPERATION

Navigate the Main menu

- 1 - Start from the Main screen (A) and press the RIGHT navigation button to enter the Main menu. If the Selection box (B) is on the Message icon, you need to press the RIGHT navigation button twice to enter the Main menu.
- 2 - Spa is the first item in the Main menu (C). Continue pressing the RIGHT navigation button to view all items in the Main menu.
- 3 - If you want to navigate back to the Main screen, press the UP-navigation button to select the Back button (D). Once the back button is selected, press the SELECT navigation button and the Main screen (A) will appear.



Navigate the Settings menu

- 1 - Start from the Main screen (A), and press the RIGHT navigation button to enter the Main menu.
- 2 - Spa is the first item in the Main menu (C). Continue pressing the RIGHT navigation button until the Settings menu is selected (E).
- 3 - Press the SELECT navigation button to enter the Settings menu (F).
- 4 - The Navigation arrow (H) indicates more settings. Press the DOWN navigation button to scroll down the list.

SET TIME-OF-DAY


Setting the Time-of-Day can be important for determining water filtration times and other background features.

Follow these steps to set the time-of-day:

- 1 - Navigate to Settings with the right arrow.
 - 2 - Press the SELECT navigation button, and scroll down to the Time screen will appear.
 - 3 - Use the navigation buttons to adjust your settings.
 - 4 - Once time is set scroll to the save button and press the SELECT button.
- You have set the time-of-day.

You can choose a 12-hour or 24-hour time display (UNITS). If you choose 24-hour time, "am" and "pm" are removed. Default is a 12-hour clock.

SPA CONTROL OPERATION

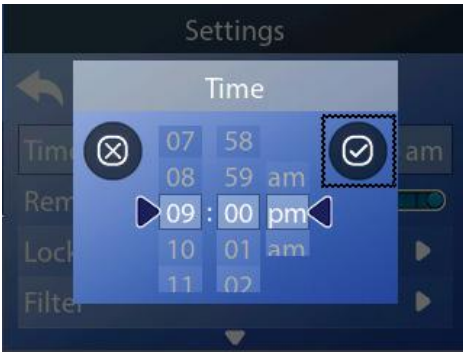

What do the dashes indicate (F)?

When the spa is powered On, four dashes appear (F) in the Water Temperature display for one minute. The dashes indicate that the spa is checking the water temperature. After the pump runs for 1 minute, the dashes disappear and the water temperature is displayed (B). The dashes may reappear after the pump has not run for one hour.

Note: The Heater Status icon flashes during heater start-up; this is normal.



SET FILTER


CYCLE TIMES

Keep your water clean and ready to enjoy!

Follow these steps to set the Filter Cycles:

- 1 - Navigate to Filter (A).*
 - 2 - Press the SELECT navigation button to view the Filter screen (B).
 - 3 - Select the start time for Filter Cycle 1 and /or 2 (C). Press the SELECT navigation button to view the time controls (E).
 - 4 - Enter your time settings (E) with the navigation buttons.
 - 5 - Select the Save button (D), and press the SELECT navigation button.
- You have set the start time for Filter Cycle 1.

SPA CONTROL OPERATION

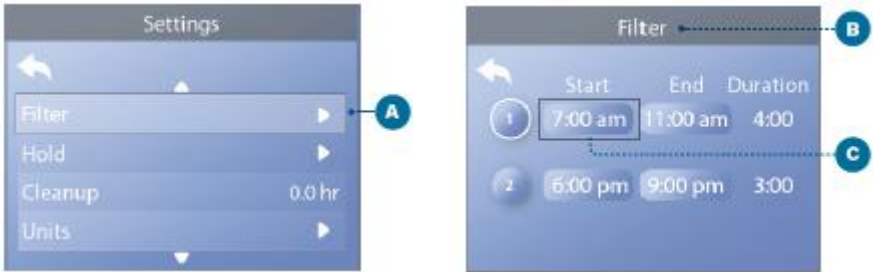

Note: Filter cycles are defaulted to 1-hour for both cycles. Do not set the start and stop time to the same time or the pump will run 24-hours.

FILTRATION AND OZONE

Pump 1 low and the ozone generator will run during a filter cycle.

FREEZE PROTECTION

If the temperature sensors within the control system's heater detect a low enough temperature (55F), then the pump(s) will automatically activate to provide freeze protection. The pump(s) will run either continuously or periodically depending on conditions.

SMARTCLEAN CYCLE

When a pump is turned on by pressing a button on the panel, a clean-up cycle begins 30 minutes after the pump is turned Off or times out. The pump and the ozone generator will run for 30 minutes or more, depending on the control system.

Heat Modes

Ready Mode

Ready mode will keep the water temperature close to the set point 24-hours a day.

Rest Mode

In Rest Mode the spa will only heat during the filter cycles.

Ready-In-Rest Mode

When the spa is set in Rest mode it will automatically revert to Ready mode for 1-hour when the Jets button is pressed.

SPA CONTROL OPERATION



Heat Mode Icons

Ready: **R**

Rest: **RF**

Ready-in-Rest: **RR**

USER PROGRAMMING

The following features allow for additional control and setting of the on-board electronics. In most cases the factory default settings are adequate for normal use and operation. To access any of the following features press TEMP and then LIGHT: then scroll through the features by continuing to press the LIGHT button. You exit the programming mode at any time by continuing to press the LIGHT button until you arrive back at the temperature display or by simply pausing for 30 seconds.

Filtration Cycles (Factory default is 1 hour two times per day)
 Your hot tub will begin the first of two filtration cycles 5 minutes after it has been powered up. The second filtration cycle will start 12 hours later. To change the time when the filtration cycles run, power down the spa for 1 minute and then turn the power back on at the point in time you want the spa to filter. For example, if you want the spa to filter at 3 PM and 3 AM, power the hot tub down at 2:55 PM or 2:55 AM. This will reset when the hot tub will run the filter cycles. In the event that the power to the hot tub is interrupted, you will need to repeat this procedure.

SPA CONTROL OPERATION

Programming how long the spa will filter

The electronic controls will allow you to change the length of time the hot tub will filter the water. This can be useful if your usage patterns vary from light to heavy and/or you need more or less filtration time to aid in maintaining water clarity. To adjust the filtration times, press the listed buttons in the following sequence. Button presses must occur within 30 seconds of each other.

To Program:

1. Press the TEMP button followed by the LIGHT button to enter the programming mode.
2. Press the TEMP button to make a change to the desired length of time. (each press changes the time in 1 hour increments).
3. Press the LIGHT button to set your selection and exit the filtration time option. If you do not do this the choice will not be saved.

Mode (Ready mode is factory default - recommended)

This feature can be used for periods when you will be gone for an extended amount of time and don't want the hot tub running on a continual basis. Running the unit in "Ready" mode will ensure the spa is at full temperature and ready for use at any time. Running the unit in "Rest" mode will only allow the spa to heat during a scheduled filtration cycle. To access and change the mode, press the listed buttons in the following sequence. Button presses must occur within 30 seconds of each other. Ready and Rest indicators are shown under the temperature in the display. When in Rest mode the panel may display "RUN PMPS FOR TEMP".

SPA CONTROL OPERATION

To Program:

1. Press the TEMP button followed by the LIGHT button to enter the programming mode.
2. Press the LIGHT button again to enter the "Mode" option.
3. Press the TEMP button to toggle between "Ready" and "Rest" options.
4. Press the LIGHT button to set your selection and exit the filtration time option. If you do not do this the choice will not be saved.

MOTOWN AUDIO SYSTEM

Please refer to the manufacturer's owner's manual for features, operation, and troubleshooting. NOTE: Avoid water splashing on the stereo face. Moisture can damage internal components. Water intrusion into stereo is not covered under warranty. See manufacturer's owner's manual for coverage information. Consult your Limited Warranty for more information about coverage.

CAUTION - Risk of Electric Shock. Replace components only with identical components.

Do not operate the audio controls while inside the spa.

WARNING – Prevent Electrocutation. Do not connect any auxiliary components (for example, cable, additional speakers, headphones, additional audio/video components, etc.) to the system, except as provided by the following: The 3.5 mm auxiliary jack is designed for input only from devices such as an MP3 player operating at 4.5 V or less.

- These units are not provided with an outdoor antenna; it should be installed in accordance with Article 810 of the National Electrical Code, ANSI/NFPA 70.
- Do not service this product yourself as opening or removing covers may expose you to dangerous voltage or other risk of injury. Refer all servicing to qualified service personnel.
- If the power supply connections or power supply cord(s) are damaged; if water is entering any electrical equipment compartment area; or if there are signs of other potential damage to the unit, turn off the unit and refer servicing to qualified service personnel.
- This unit should be subjected to periodic routine maintenance (i.e. once every three months) to make sure that the unit is operating properly.

Audio Expansion Port (Optional)

The built-in audio expansion port allows you to connect optional accessories. Use the supplied 3.5 mm cord to attach MP3 player. NOTE: The 3.5 mm auxiliary jack is designed for input only from devices such as an MP3 player operating at 4.5V or less.

MICROSILK® OPERATING INSTRUCTIONS (OPTIONAL)

- Press the "Start" button on the MicroSilk® panel that is located next to the master control panel to turn on the feature.

SPA CONTROL OPERATION


- The pump will start and you will notice the presence of the micro-bubbles beginning to enter the water from two fittings in the footwell. Do not block these fittings during operation. Periodic bursts of air are normal and will not affect operation or effectiveness.
- It can take up to 8 minutes depending on the size of model to completely fill the water with micro-bubbles. You will notice the water will change from clear to milky in appearance.
- If any of the other therapy pumps are on, they will be turned off automatically after pressing the start button and may take up to 30 seconds for pumps to turn off. This is necessary for the proper concentration of micro bubbles to be generated.
- The MicroSilk® pump will run for 20 minutes and then automatically turn off. If continued operation is desired, pressing the “Start” button will restart the system for another 20 minutes.
Please note: Periods longer than 20 minutes in elevated temperature may be harmful to your health. Please refer to the safety instructions in the Owner’s Manual.
- To manually turn the feature off, simply press the “Start” button a second time to turn off.
- A clean-up cycle will automatically turn on the filtration pump 30 minutes after using the feature.

Maintenance Considerations

- Due to the nature of how MicroSilk® works to exfoliate the skin, you may notice higher levels of body oils than normal. This can also be increased if multiple bathers are using the feature at the same time or more frequently. As a result, setting the controls to perform longer filtration or clean-up cycles may be necessary. Please refer to the instructions in the Owner’s Manual to make a change to the duration of the filtration or clean-up cycle.
- It is recommended to clean the filter cartridge/s once per month or twice a month if you are frequently using this feature to exfoliate, to ensure they are free from debris and oils. Failure to do so may result in poor water quality or the ability to properly clean up the water after use.
- It may be necessary to increase the setting on the bromine or chlorine cartridge located in the in-line sanitation housing or increase the amount of other sanitizer you may be using. Checking the sanitizer regularly and adjusting as needed is very important to water safety.


Please note: The MicroSilk system is adjusted during the manufacturing process for optimal performance and should not need further adjustment, however, under certain conditions such as altitude, temperature and water condition at the customer location small adjustments may need to be made. To adjust the MicroSilk flow, locate the valve handle on the suction side of the Microsilks pump. The valve may be located behind the access panel on the side of the unit. When adjusting the valve use small incremental turns and check performance. If the performance does not improve try turning the valve in the opposite direction until the desired performance is obtained.

THE WOODSTOCK™ ELITE

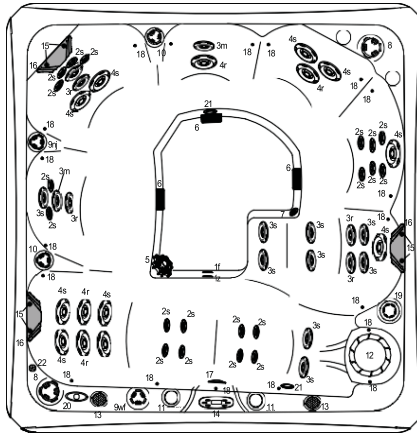


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	20
3s	300 Series Jets Straight	10
3r	300 Series Jets Rotator	4
3m	300 Series Jets Multi-port	2
4s	400 Series Jets Straight	10
4r	400 Series Jets Rotator	4
5	Whitewater-4 Jet	1
6	Suction Fittings	3
7	Floor Drain	1
8	2-Way Valve	2
9wf	Waterfall Valve	1
9nj	Neck Jet Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	6
16	Headrests	3
17	LED Lights	1
18	Theatre LED Lighting	2 (17 opt)
19	In-Line Housing (optional)	1
20	MicroSilk Button (optional)	1
21	MicroSilk Return Fitting (optional)	2
22	MicroSilk Air Intake Fitting (optional)	1
Physical Specifications		Size
Dimensions		90" x 90"
Height		36"
Seating Capacity/Positions		7/7
Weight Dry/Lbs.		780
Weight Full/Lbs.		4621
Water Capacity/Gallons		460
Total Therapy Jets		51


THE WOODSTOCK™ ELITE ZONES

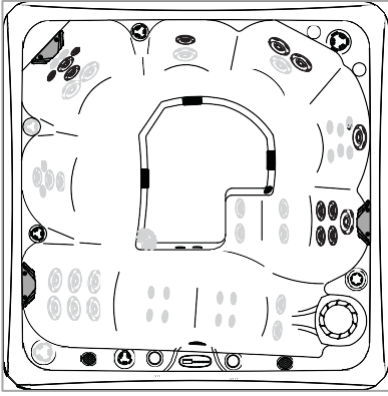


**PUMP 1
ZONE 1**

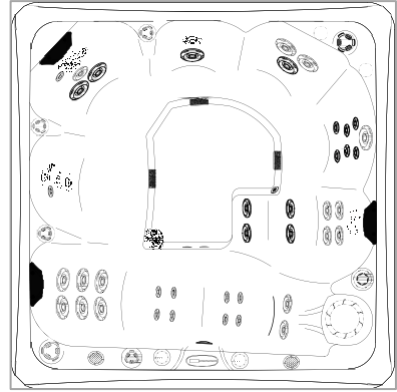


**PUMP 1
ZONE 2**

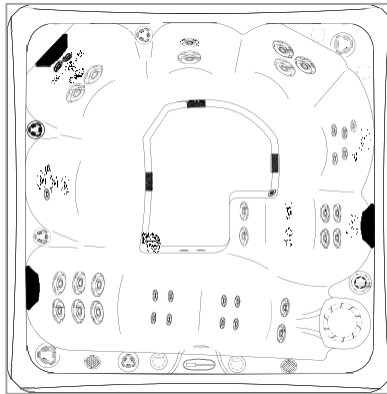

**PUMP 1 NECK
JETS**

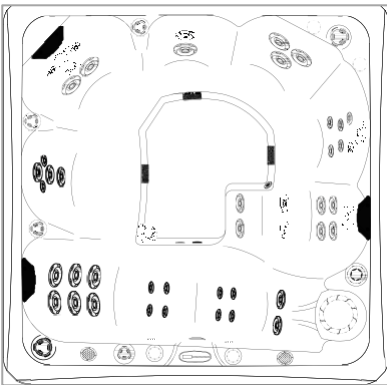


**PUMP 2
ZONE 1**

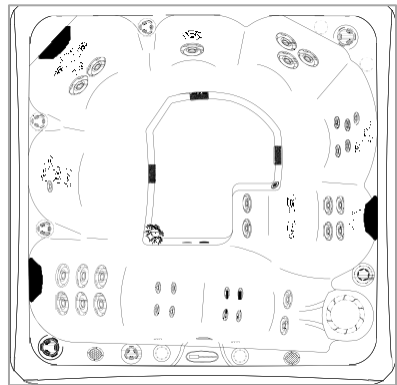


**PUMP 2
ZONE 2**

THE VEGAS™ ELITE

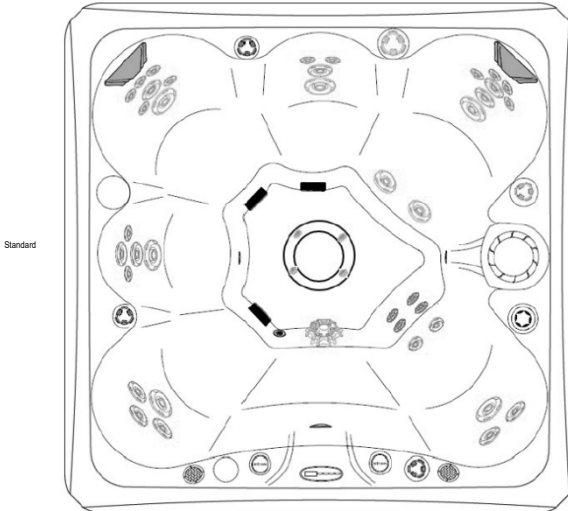


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	21
3s	300 Series Jets Straight	7
3r	300 Series Jets Spin	4
3m	300 Series Jets Multi-port	2
4s	400 Series Jets Straight	4
4r	400 Series Jets Rotator	2
5	Whitewater-4 Jet	1
6	Suction Fittings	3
7	Floor Drain	1
8	2-Way Valve	1
9wf	Waterfall Valve	1
9nj	Neck Jet Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	4
16	Headrests	2
17	LED Lights	1
18	Theatre LED Lighting	2 (15 opt)
19	In-Line Housing (optional)	1
20	MicroSilk Button (optional)	1
21	MicroSilk Return Fitting (optional)	2
22	MicroSilk Air Intake Fitting (optional)	1
Physical Specifications		Size
Dimensions		84" x 84"
Height		36"
Seating Capacity/Positions		7/7
Weight Dry/Lbs.		700
Weight Full/Lbs.		3873
Water Capacity/Gallons		380
Total Therapy Jets		41

THE VEGAS™ ELITE ZONES

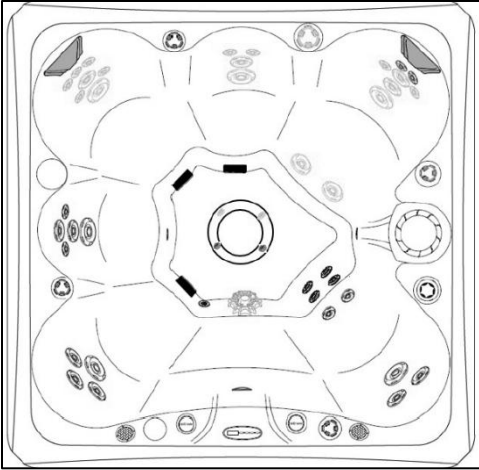


PUMP 1
ZONE 1

Neck
Jets
operate
in Pump
1

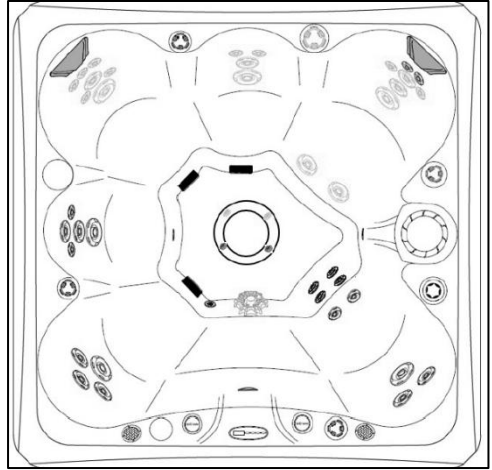


PUMP 1
ZONE 2

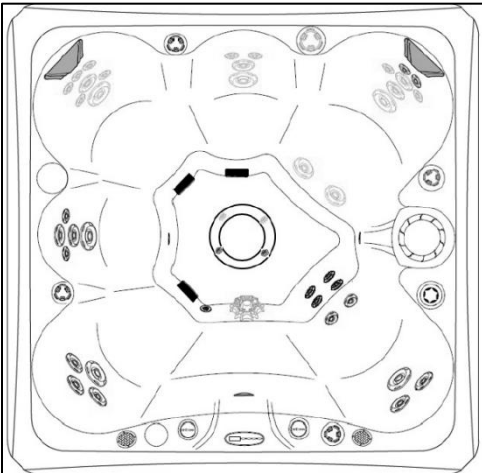


PUMP 2

THE HOLLYWOOD™ ELITE

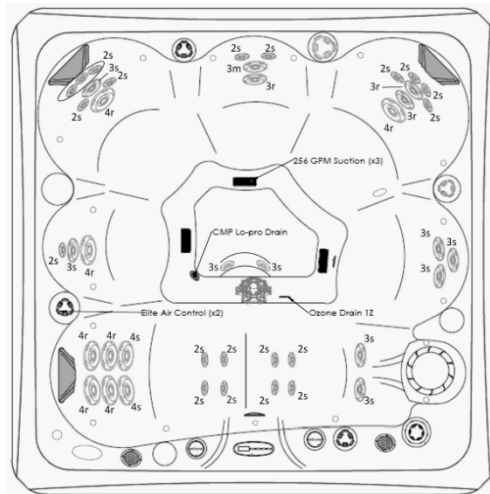


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	20
3s	300 Series Jets Straight	8
3r	300 Series Jets Rotator	2
3m	300 Series Jets Multi-port	1
4s	400 Series Jets Straight	4
4r	400 Series Jets Rotator	5
5	Whitewater-4 Jet	1
6	Suction Fittings	3
7	Floor Drain	1
8	2-Way Valve	1
9wf	Waterfall Valve	1
9nj	Neck Jet Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	6
16	Headrests	3
17	LED Lights	1
18	Theatre LED Lighting	2 (15 opt)
19	In-Line Housing (optional)	1
20	MicroSilk Button (optional)	1
21	MicroSilk Return Fitting (optional)	2
22	MicroSilk Air Intake Fitting (optional)	1
Physical Specifications		Size
Dimensions		84" x 84"
Height		36"
Seating Capacity/Positions		6/6
Weight Dry/Lbs.		740
Weight Full/Lbs.		3659
Water Capacity/Gallons		350
Total Therapy Jets		41


THE HOLLYWOOD™ ELITE ZONES

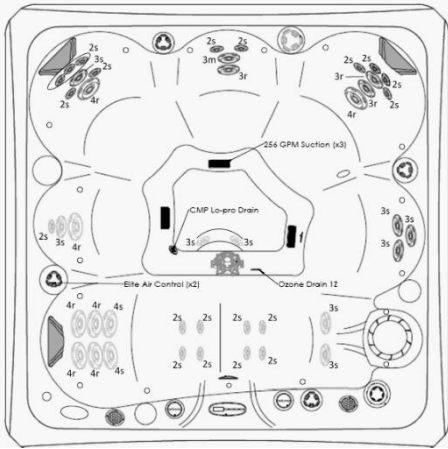

**PUMP 1
ZONE 1**

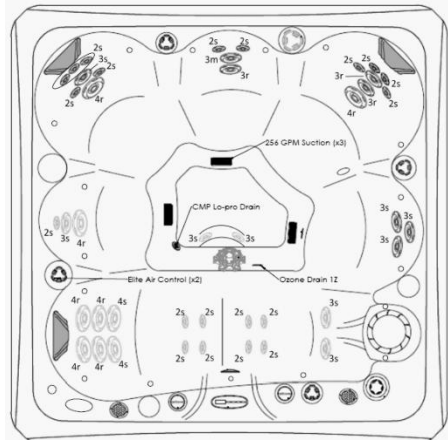


**PUMP 1
ZONE 2**

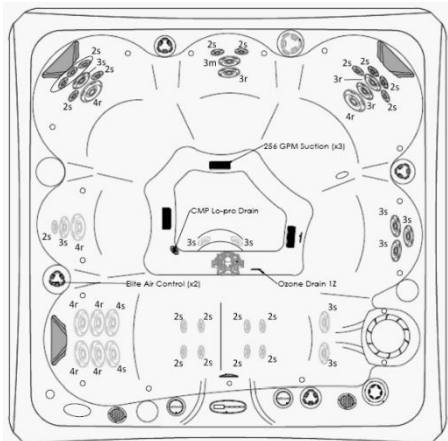

PUMP 2


THE BROADWAY™ ELITE

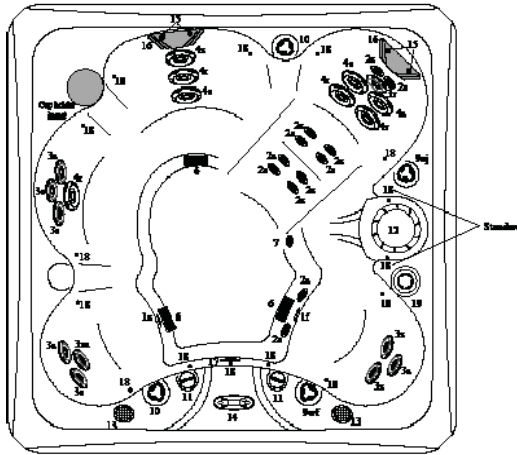


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	12
3s	300 Series Jets Straight	8
3r	300 Series Jets Rotator	1
3m	300 Series Jets Multi-port	1
4s	400 Series Jets Straight	4
4r	400 Series Jets Rotator	4
6	Suction Fittings	3 (1 1-pump)
7	Floor Drain	1
9wf	Waterfall Valve	1
9nj	Neck Jet Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	4
16	Headrests	2
17	LED Lights	1
18	Theatre LED Lighting (optional)	2 (13 opt)
19	In-Line Housing (optional)	1
20	MicroSilk Button (optional)	1
21	MicroSilk Return Fitting (optional)	2
22	MicroSilk Air Intake Fitting (optional)	1
Physical Specifications		Size
Dimensions		77" x 77"
Height		36"
Seating Capacity/Positions		5/5
Weight Dry/Lbs.		530
Weight Full/Lbs.		3115
Water Capacity/Gallons		310
Total Therapy Jets		30

THE BROADWAY™ ELITE ZONES

Broadway Elite 1 Pump Model

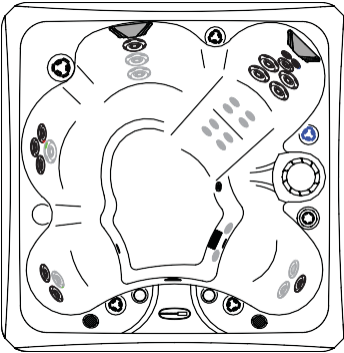


PUMP 1
ZONE 1

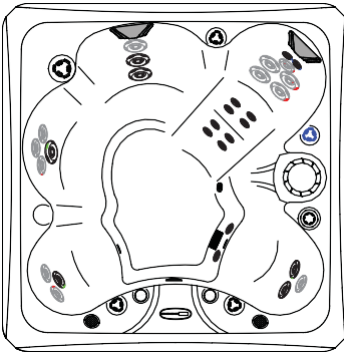


PUMP 1
ZONE 2

Broadway Elite 2 Pump Model

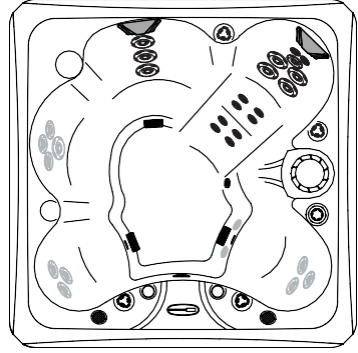


PUMP 1

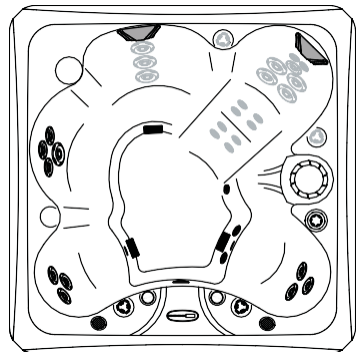

PUMP 2


MONACO™ ELITE

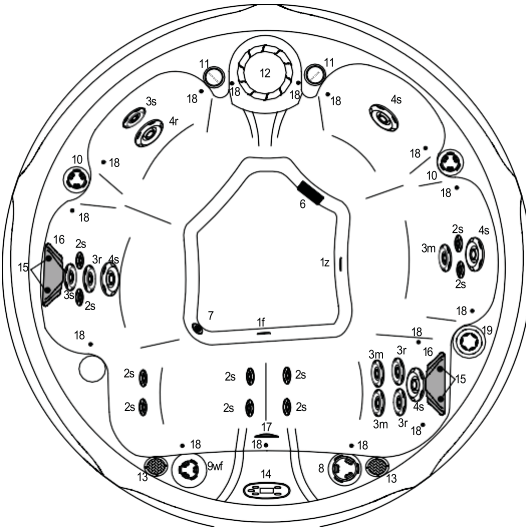


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	10
3s	300 Series Jets Straight	2
3r	300 Series Jets Rotator	3
3m	300 Series Jets Multi-port	3
4s	400 Series Jets Straight	4
4r	400 Series Jets Rotator	1
6	Suction Fittings	1
7	Floor Drain	1
8	2-Way Valve	1
9wf	Waterfall Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	4
16	Headrests	2
17	LED Lights	1
18	Theatre LED Lighting	2 (13 opt)
19	In-Line Housing (optional)	1
Physical Specifications		Size
Dimensions		80" x 80"
Height		36"
Seating Capacity/Positions		5/5
Weight Dry/Lbs.		500
Weight Full/Lbs.		2590
Water Capacity/Gallons		250
Total Therapy Jets		23

THE MONACO™ ELITE ZONES


ZONE 1

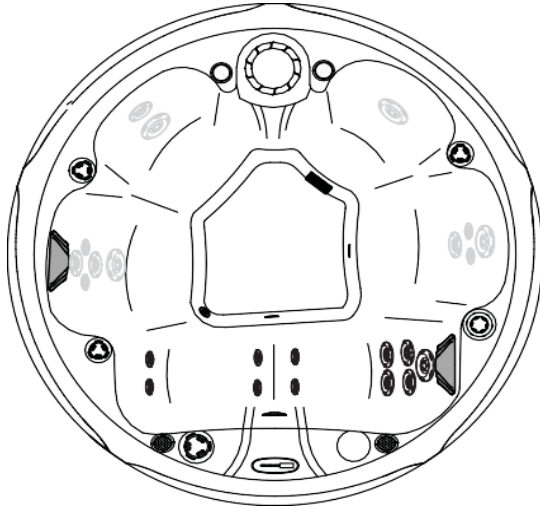

ZONE 2

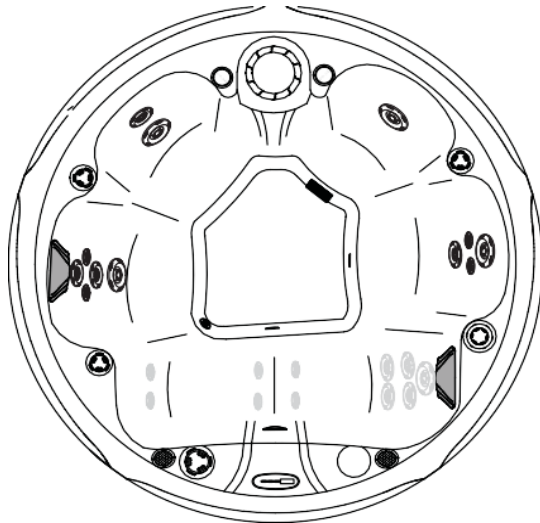


THE NASHVILLE™ ELITE

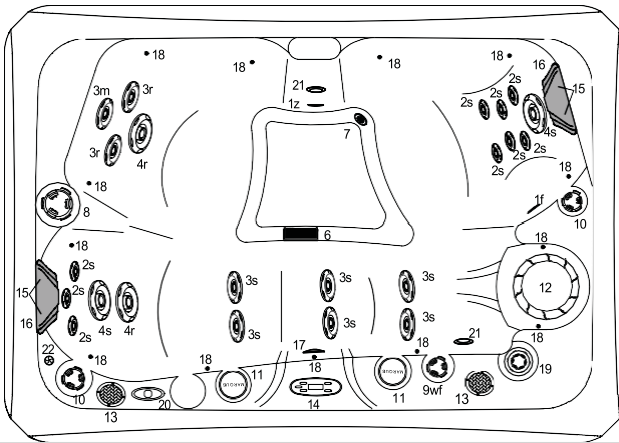


#	Component Identification	Qty.
1f	Frog Wall Fitting (optional)	1
1z	Ozone Wall Fitting	1
2s	200 Series Jets Straight	9
3s	300 Series Jets Straight	6
3r	300 Series Jets Rotator	2
3m	300 Series Jets Multi-port	1
4s	400 Series Jets Straight	2
4r	400 Series Jets Rotator	2
6	Suction Fitting	1
7	Floor Drain	1
8	2-Way Valve	1
9wf	Waterfall Valve	1
10	Air Control Valves	2
11	Waterfall	2
12	Skimmer	1
13	Stereo Speakers (optional)	2
14	Control Panel	1
15	Headrest Buttons	4
16	Headrests	2
17	LED Lights	1
18	Theatre LED Lighting (optional)	2 (11 opt)
19	In-Line Housing (optional)	1
20	MicroSilk Button (optional)	1
21	MicroSilk Return Fitting (optional)	2
22	MicroSilk Air Intake Fitting (optional)	1
Physical Specifications		Size
Dimensions		60" x 84"
Height		29.5"
Seating Capacity/Positions		2/3
Weight Dry/Lbs.		400
Weight Full/Lbs.		2026
Water Capacity/Gallons		225
Total Therapy Jets		22

THE NASHVILLE™ ELITE ZONES

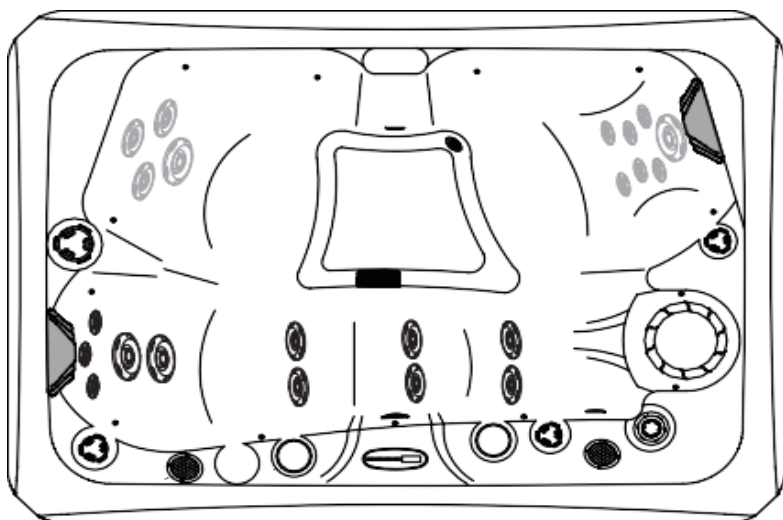



ZONE 1

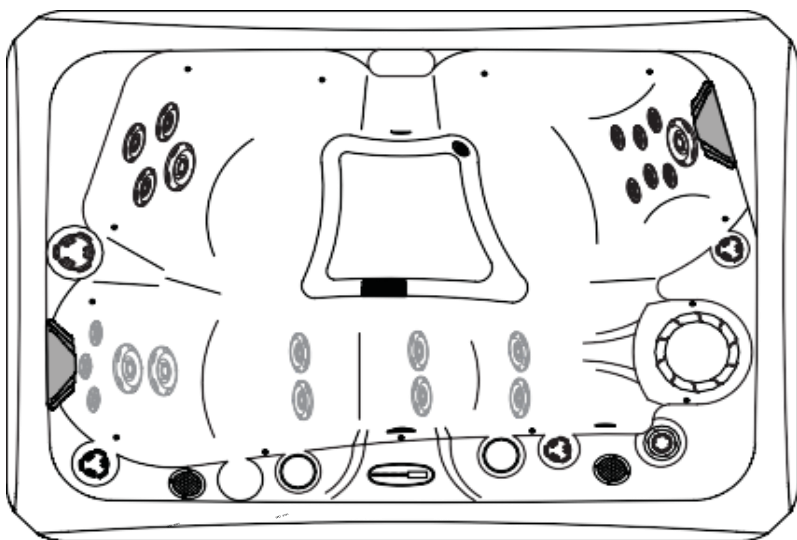

ZONE 2

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS



WOODSTOCK ELITE EQUIPMENT

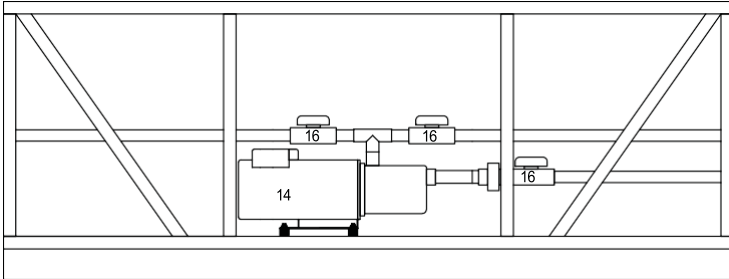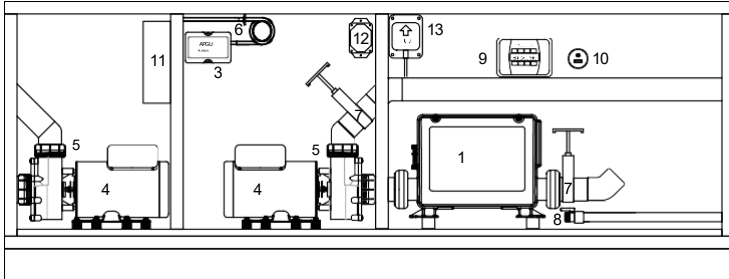

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pumps	2
5	Pump unions	4
6	Check valve	1
7	Slice valves	2
8	Hose bib drain	1
9	Audio system (optional)	1
10	Audio expansion port (optional)	1
11	Stereo power supply (optional)	1
12	LED light controller (optional)	1
13	Wi-Fi transceiver (optional)	1
14	MicroSilk pump (optional)	1
16	MicroSilk shut off valves (optional)	3

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS


HOLLYWOOD ELITE & VEGAS ELITE EQUIPMENT

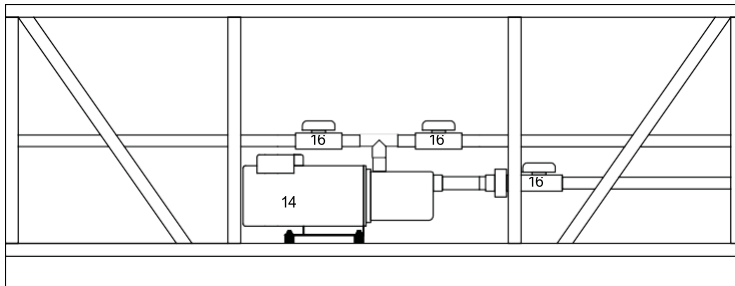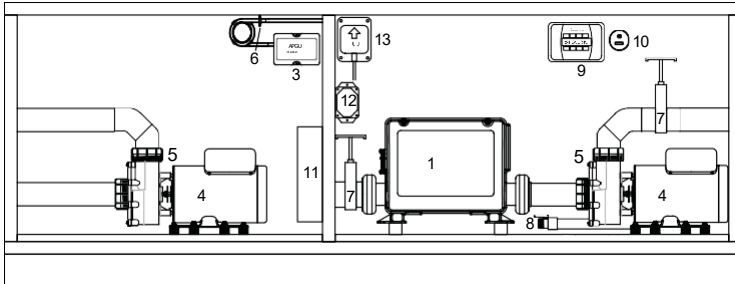

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pumps	2
5	Pump unions	4
7	Slice valves	2
6	Check valve	1
8	Hose bib	1
9	Motown Audio (optional)	1
10	Audio expansion port (optional)	1
11	Stereo power supply (optional)	1
12	LED light controller (optional)	1
13	Wi-Fi (optional)	1
14	MicroSilk® pump (optional)	1
16	MicroSilk shut off valves (optional)	3

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS


HOLLYWOOD ELITE & VEGAS ELITE EQUIPMENT

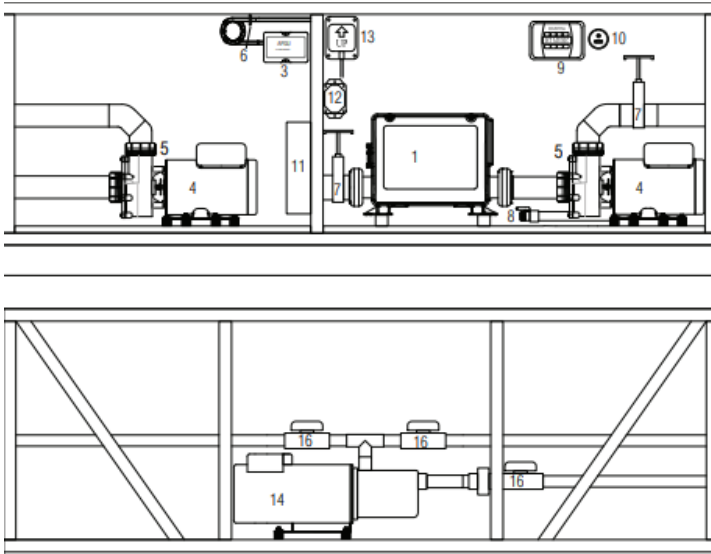

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pumps	2
5	Pump unions	4
7	Slice valves	2
6	Check valve	1
8	Hose bib	1
9	Motown Audio (optional)	1
10	Audio expansion port (optional)	1
11	Stereo power supply (optional)	1
12	LED light controller (optional)	1
13	Wi-Fi (optional)	1
14	MicroSilk® pump (optional)	1
16	MicroSilk shut off valves (optional)	3

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS

BROADWAY ELITE EQUIPMENT 1 PUMP

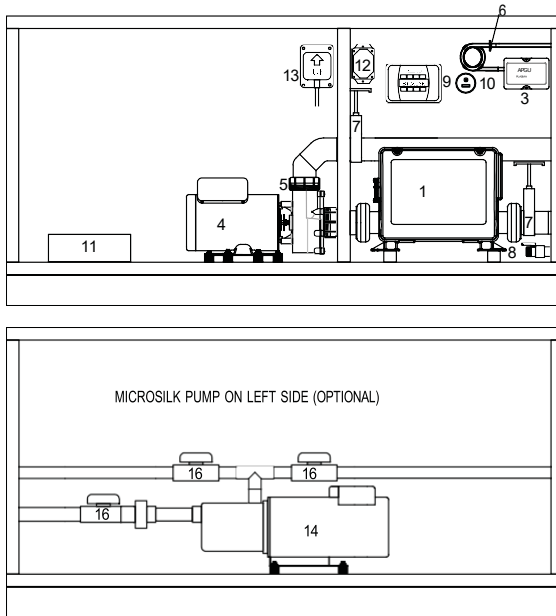


#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pump	1
5	Pump unions	2
6	Check valve	1
7	Slice valve	2
8	Hose bib	1
9	Motown Audio (optional)	1
10	Audio expansion port (optional)	1
11	Stereo power supply (optional)	1
12	LED light controller (optional)	1
13	Wi-Fi (optional)	1
14	MicroSilk® pump (optional)	1
16	MicroSilk shut off valves (optional)	3

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS

BROADWAY ELITE EQUIPMENT 2 PUMP



6

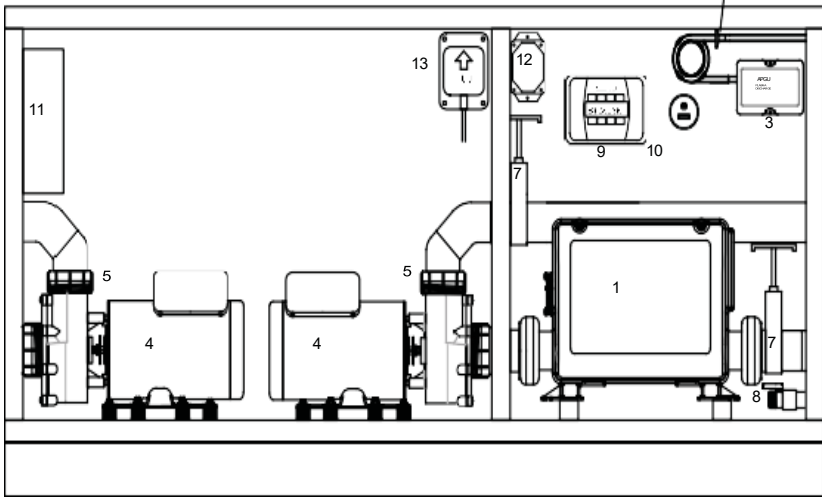

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pump	2
5	Pump unions	4
6	Check valve	1
7	Slice valve	2
8	Hose bib	1
9	Motown Audio (optional)	1
10	Audio expansion port (optional)	1
11	Stereo power supply (optional)	1
12	LED light controller (optional)	1
13	Wi-Fi (optional)	1

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS


NASHVILLE ELITE EQUIPMENT

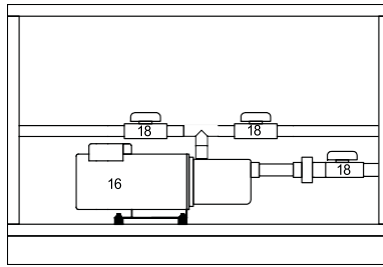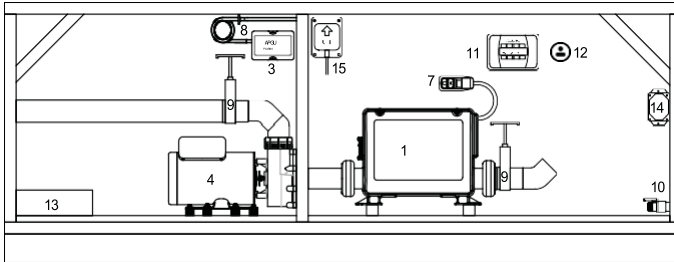

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pump	1
7	GFCI (115V US/CA)	1
8	Check valve	1
9	Hose valves	2
10	Hose bib drain	1
11	Audio system (optional)	1
12	Audio expansion port (optional)	1
13	Stereo power supply (optional)	1
14	LED light controller (optional)	1
15	Wi-Fi transceiver (optional)	1
16	MicroSilk® pump (optional)	1
18	MicroSilk® Shut off valves (optional)	3

MARQUIS ELITE HOT TUBS EQUIPMENT DIAGRAMS

MONACO ELITE EQUIPMENT

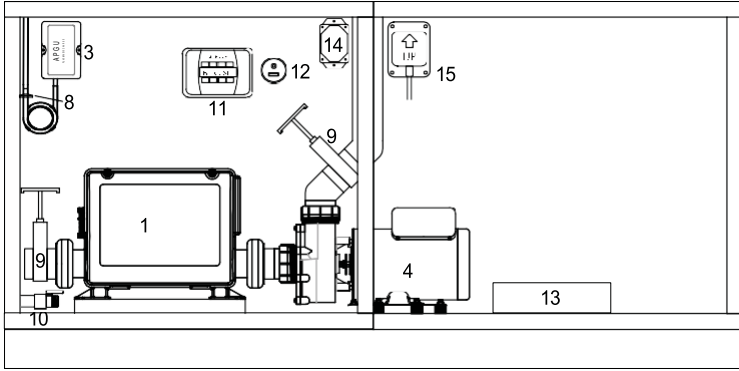

#	Component	Qty.
1	Control box and heater	1
3	Ozonator (optional)	1
4	Pump	1
8	Check valve	1
9	Slice valves	2
10	Hose bib drain	1
11	Audio system (optional)	1
12	Audio expansion port (optional)	1
13	Stereo power supply (optional)	1
14	LED light controller (optional)	1
15	Wi-Fi transceiver (optional)	1

MARQUIS ELITE HOT TUBS TROUBLESHOOTING GUIDE

PLEASE NOTE: The following corrective actions may be performed by the spa owner. If the trouble cannot be corrected in the steps below, please contact your authorized dealer for service. (Improper servicing by an unauthorized service provider or spa owner could result in damage not covered by the warranty and could cause serious injury.)

EQUIPMENT WILL NOT OPERATE

- Check the control panel LCD window for diagnostic code.
- 230V Spas: Check the circuit breaker on the main circuit panel.

INADEQUATE JET ACTION

- Be sure the shut-off valves are completely open.
- Open the jets by turning the jet face to allow for maximum water flow.
- Check for obstruction or restrictions at suction guard(s) or filters, such as leaves, etc.
- Check to ensure water is at proper level and add water if needed.

NO HEAT

- Check temperature displayed in the LCD window for desired temperature setting.
- Inspect the filter cartridge for dirt and debris.
- Check that the water is at proper level, 2/3 up the skimmer.
- Check to make sure spa is in High Range. See above for programming the temperature range.
- Lower ambient temperatures may result in heat loss.

NOTE: Do not expect instant hot water from the jets. It will take the heater 12-24 hours to heat the water to the temperature you desire.

LIGHT DOES NOT WORK

- Press the LIGHT pad on the control panel.
- Check connections of light wires.

LCD DIAGNOSTIC MESSAGES

The advanced technology built into the spa allows it to perform a number of self-diagnostic system checks and it can display a variety of messages in the LCD window on the control panel.

TOO COLD: Freeze protection has been activated and no correction action is required. This is normal on a fresh fill.

WATER TOO HOT: One of the sensors has reached 110°F (43°C). Do not enter the water; contact your dealer for service.

HTR FLOW LOSS: There is not enough water flow through the heater. Clean or install new filter(s) and check that the slice valves are fully open. Call dealer for service.

MARQUIS ELITE HOT TUBS TROUBLESHOOTING GUIDE

HTR MAY BE DRY: There is little to no water flow through the heater. Check that the slice valves are fully open. Contact dealer for service.

HTR TOO HOT: One of the sensors has reached 118°F (48°C). Do not enter the water. Contact dealer for service.

PRES BTTN TO RSET: Some codes require a button press or power to be removed and restored.

SNSR BALANCE: The sensors are reading a temperature of 2°F (17°C) or more. This can occur on a fresh fill, no corrective action required. Contact dealer for service.

SNSR A: Sensor A is non-functional. Contact dealer for service.

SNSR B: Sensor B is non-functional. Contact dealer for service.

RSET: Memory has failed. Contact dealer for service.

Contact dealer for service.

STUK PUMP: Water may be overheated (DO NOT ENTER THE WATER). Contact dealer for service.

HOT FALT: A pump may be stuck on. Contact dealer for service.

SPA MAINTENANCE

HOW TO PROLONG THE LIFE OF YOUR HOT TUB

There are some simple steps you can take to prolong the life of your hot tub. Please follow the guidelines listed below to ensure the most trouble-free and enjoyable use of your spa.

Rinse your feet

Please remember to rinse your feet before getting into the hot tub. This will help prevent sand and dirt from entering the plumbing system where it can clog valves and plug filters.

Use a suction sock

Please also use a suction sock to further reduce the amount of debris that can enter the plumbing system. Contact your authorized Dealer to inquire about the availability of suction socks.

Maintain your valves

If one of your valves begins to feel hard to turn, please remove the valve and rinse it. To remove the valve, please turn the power off to the spa and remove the handle for the valve. Turn the top portion of the valve cap counterclockwise to expose the valve insert. Using the valve stem, please pull straight up on the insert. Rinse the valve and put back the insert into the sleeve and then replace the cap and handle. If the valve is scratched, it is a good idea to use a fine grit sandpaper to smooth the valve insert before reinstallation.

SPA WATER SHALL BE TESTED AND TREATED IN ACCORDANCE WITH ALL LOCAL CODES**Keep the cover on**

Always keep your hot tub cover closed when the spa is not in use. This helps prevent unwanted debris from entering the hot tub and prevents sun exposure that could damage the surface and the jets of the hot tub. For full warranty coverage, please note the spa must remain covered at all times when not in use.

Keep the water clear and balanced

Water chemistry is another important part of spa ownership. Please be sure to use only factory recommended products. In addition, please make sure you maintain proper pH and sanitizer levels. Drain and refill your hot tub with fresh water every 3 to 4 months. On a regular basis, please use a spa vacuum to remove dirt and sand that can be seen on the floor of the hot tub.

NOTE: Damage to the spa surface and equipment due to the use of trichloro-chlorine, or other harsh chemicals not recommended by Marquis is not covered under warranty.

WEEKLY MAINTENANCE**Removing Debris**

Remove any debris and leaves from the skimmers and suction guard(s) on the inside of the spa. Blocked intakes can impede the flow of water through the jetting system.

Water Level

Replenish the water level if necessary, so that it is approximately 2/3 up the skimmer. (See STARTING YOUR SPA.) Low and high-water levels can damage your spa. It is important to check your water level often.

MONTHLY MAINTENANCE

Filter Care

We cannot stress enough the importance of a clean filter for proper water filtration. Dirty filters can restrict water flow, cause hazy water, and prevent your chemicals from working properly. Dirty filters can also cause low flow from jets, poor water clarity and sensors to activate error codes. It is important to clean filters regularly. Many water treatment products clear or clarify the water by clumping microscopic particles and minerals together so that these larger particles can be effectively trapped in the filter. A filter clogged with debris and calcium deposits does not trap particles properly. Soak your filter cartridges in *Filter Cleaner* monthly.

NOTE: Filters and filter lids do not qualify for labor coverage. These parts can be purchased or exchanged under warranty at your authorized Marquis Elite Hot Tubs dealer.

Leakage Detection

Open the equipment door and check for signs of water leakage around the pump(s). Pump seals wear out over time, especially with improper water chemistry. Early detection of pump seal failure can significantly reduce repair costs. Pump seals, heater gaskets and pump gaskets must be checked each month to ensure they are not leaking. Further damage caused by a leak from any component is not covered under the warranty.

EVERY THREE TO FOUR MONTHS

Draining and Filling the Spa

The average spa needs to be drained every three to four months. After months of continually adding chemicals to the water and introducing body oils and lotions, the water can be difficult to manage, and chemicals are not as effective as usual. You may also notice excessive foaming. More frequent draining may be required depending on use.

Draining the Spa

1. Turn off the power to the spa.
2. Open the equipment compartment (see EQUIPMENT DIAGRAM). Remove the hose bib cap from the connection and attach a hose.
3. Open the drain valve. Gravity causes the water to drain out of the hose.
4. When the spa is empty, close the drain valve and remove the hose. Reinstall the hose bib plug.

NOTE: Keep the drain valve closed at all times except when draining the spa (do not rely on the cap to stop the flow of water). Not doing so could result in damage to the drain valve due to freezing water.

Cleaning the Interior

Once the spa is drained, clean the shell interior thoroughly – especially at the water line. We suggest the *Glove Sponge* to clean without scratching.

Clean with Spa Brite and shine shell with Gloss and Guard. Use only chemicals recommended to you by your dealer or service agent. Bleach (diluted) is another recommended cleaning agent for the shell – other products should be avoided except as stated below.

To maintain the high gloss and elegant look of the shell, just follow these simple steps: For normal care and cleaning use a soft cloth or sponge with Gloss & Guard. Rinse well and dry with a soft, clean cloth. Never use abrasive cleaners. Do not allow your acrylic surface to come into contact with products such as ketones or esters such as acetone or ethyl acetate (nail polish remover), Wintergreen oil (methyl salicylate), nail polish, dry cleaning solution or other chlorinated organic solvents, lacquer thinners, gasoline, aromatic solvents, citrus cleaners, pine oil, etc. Remove dust and dry dirt with a soft, damp cloth. Clean grease, oil, paint and ink stains with diluted isopropyl (rubbing) alcohol (do not let alcohol pool or remain on acrylic). Dry with a clean, soft cloth. Avoid using razor blades or other sharp instruments that might scratch the surface.

NOTE: Due to the high-gloss, fine finish of the acrylics, imperfections in the surface texture may occur. A natural aging process in acrylic can lead to a process called crazing. Fine spider web-like lines can form on the cosmetic surface of acrylic over time after exposure to the elements and chemicals. Crazing represents no structural weakening of acrylic and is not covered under the warranty. Fading, staining and discoloration may also occur but represent no structural degradation and are not covered under warranty.

NOTE: Do not leave an empty spa uncovered. Direct sunlight on the spa surface can cause severe damage or blemishing, cause fittings to discolor and can result in the voiding of any surface warranties.

Refill the Spa

Fill the spa with fresh water from a garden hose and balance the water as described in the Water Treatment section. The use of a *Fill Filter* is recommended when filling, especially in areas of high mineral content in the water. Attach to the end of a garden hose to filter out any grit and sediment that could accumulate in the spa and potentially scratch the spa surface.

AS NEEDED MAINTENANCE

Cover Care

It is recommended that you use *Cover Cleaner* to keep the cover clean and conditioned. Proper care of the cover increases the life and keeps it looking great in even the harshest conditions. NOTE: Do not use regular household products or products that contain silicone, alcohol, steel wool, or bleach.

1. Remove the cover from the spa and gently lean it against a wall or fence.
2. Use a garden hose to spray the cover and loosen and rinse away dirt or debris.
3. Use a large sponge and/or soft bristle brush with a very mild soap solution. Scrub the vinyl top in a circular motion. Rinse vinyl clean before a soap film has a chance to dry.
4. Scrub the perimeter of the cover and side flaps. Rinse clean with water.
5. Rinse off underside of cover with water only (no soap) and wipe clean with a dry rag.
6. Use *Cover Cleaner* to condition the top of the cover after cleaning.

Headrest Care

To increase the life of your headrest, remove and replace them with care only when necessary.

Remove Headrest

Slip your fingers under each end of the interior headrest part and gently pull straight towards you. Damage caused to attachments due to improper removal is not covered under warranty. Pillows and attachments are warranted to be free of defects at delivery only.

Exterior Care

Clean the exterior of the spa with a mild soap and water solution. Cleaners that contain alcohol or high levels of solvents, along with Acetone, Nitrobenzene, and Cyclohexanol, can dissolve and discolor the DuraWood exterior.

Excess Debris

Grit and debris tracked into the spa should be removed with a spa vacuum.

Water Line

To avoid buildup of oils and lotions at the water line, clean the interior weekly or when needed. We suggest the Glove Sponge to clean without scratching. NOTE: Do not use the same brush or sponge to clean the exterior of the spa and the interior of the spa. Soap and other product residue used on the outside of the spa can cause foaming of the spa water and scratches to the spa surface if used on the inside of the spa.

SUSPENDED USE OR WINTERIZING THE SPA

If you decide to discontinue the use of your spa for any extended period of time, we suggest you follow the steps below.

NOTE: During long periods of inactivity, damage can occur to equipment from condensation within the equipment compartment. Failure to follow these instructions during freezing conditions will result in cracked fitting(s) and glue joints, and other damage.

SPA MAINTENANCE

1. Turn off the power to the spa.
2. Drain the spa. (See DRAINING AND REFILLING THE SPA.)
3. Remove all residual water from the seating and footwell. If necessary, bail out the remaining water then dry the spa with towels. A wet/dry vacuum is recommended for best results.
4. Using the wet/dry vacuum, place vacuum nozzle over each jet nozzle to remove water from plumbing lines, starting with the highest jet and finishing with the lowest jet. NOTE: The spa is equipped with a zone control valve which is used to divert water between different jet zones. The valve must be "open" to the particular jets you are vacuuming.
5. Unscrew the pump plug(s) from the pump(s). (See STARTING YOUR SPA.)
6. Again, using the wet/dry vacuum, place nozzle over the exposed pump opening(s) to remove excess water. The pump(s) should be removed from the spa and stored in a climate-controlled room.
7. Clean the spa interior.
8. Clean the filter cartridges.
9. Reinstall the cover and lock in place. NOTE: Direct sunlight on the spa surface can cause severe damage or blemishing and can result in the voiding of any surface warranties.

VACATION CARE INSTRUCTIONS

Short time periods: 3-5 days

1. Adjust the pH (see WATER CARE).
2. Sanitize the water by following the shock procedures.
3. Lock your spa cover in place with cover locks.
4. Upon return, shock sanitizes water.

Long time periods: 5-14 days

1. One day before leaving, set the temperature to its lowest level (approximately 80°F, 27°C).
2. Adjust pH as needed.
3. Shock sanitize water.
4. Upon return, shock sanitizes water.
5. Return temperature to original setting.
6. Test water chemistry and adjust as necessary.

IMPORTANT CHEMICAL SAFETY PROCEDURES

1. Always keep chemicals out of reach of children.
2. Read product labels carefully prior to use.
3. When dissolving, always add chemicals to water, do not add water to chemicals. Some dry chemicals should be dissolved prior to adding them to the spa. Using a clean container, dip some water from the spa. Mix until dissolved, then add to circulating water.
4. **CAUTION:** Do not mix chemicals together. Add them separately to the spa water.
5. All chemical products should be stored in a cool, dry, well-ventilated area where the average temperature does not exceed 90°F (32°C). Keep storage area clean of debris such as rags, newspaper, and combustible materials.
6. Keep chemicals away from open flame or other heat source. Do not smoke near chemicals. If a dry chlorine chemical fire should occur, use water only. Do not use a dry chemical fire extinguisher to attempt to put out the fire.
7. When adding chemicals, always keep the water circulating in the spa with jets in a downward circular pattern for better chemical distribution. Add chemicals to the spa water one at a time. Allow several minutes between any new chemical additions using the jet action to evenly distribute throughout the spa.
8. It is important to leave the spa cover open for 20-30 minutes while shock treating your spa to avoid damage. Do not leave spa unattended while cover is open. Damage such as discoloration or brittle vinyl due to chemical damage is not covered under the warranty.
9. After adding chemicals, wait the amount of time recommended on the chemical container before retesting your water for an accurate reading. Retest your spa water before using.
10. If you have any questions or concerns about the correct procedures for handling chemicals, please contact your authorized Marquis® dealer.

CAUTION: Damage to the spa surface and equipment due to the use of trichlor chlorine, or other harsh chemicals not recommended by Marquis is not covered under warranty.

WATER CARE

There are three things necessary for clean safe water:

1. **CIRCULATE:** Water has to be circulated regularly; it cannot be stagnant.
2. **FILTER:** Water has to be filtered to remove particulates and debris.
3. **SANITIZE:** Water has to be sanitized to kill organisms like algae, bacteria and virus.

It is critical to maintain proper water balance to protect the spa heater and other components from damage. Damage to the spa surface and equipment caused by poor chemical or harsh chemical treatment is not covered under the warranty. Discoloration of jet faces, valves and controls are an indication of poor chemical maintenance or exposure to the sun.

Jet inserts and valves do not qualify for labor coverage. These parts can be purchased or exchanged under warranty at your authorized Marquis® dealer. Gaskets and seals are not covered under the warranty. The control system in your Marquis spa will automatically circulate and filter. (See SPA CONTROL OPERATION, ConstantClean™ and SmartClean™ sections.) The sanitation requires minimal effort if done consistently and properly.

To sanitize spa water, three things are required:

1. **BALANCE:** The water must be balanced so the sanitizer can work and spa equipment is protected.
2. **SHOCK:** Shock to oxidize organics and maximize sanitizer efficiency.
3. **SANITIZE:** Maintain a proper level of sanitizer at all times.

UNDERSTANDING WATER BALANCE

Water balance is the interrelation of factors that determine the quality of the spa water. The effectiveness of chemicals and other additives are dependent on all these factors working together or “in balance”. The primary elements to water balance are the calcium hardness, total alkalinity and pH. Always use water treatment products recommended for use in a Marquis spa.

pH Balance

Keeping the pH balanced is the most critical component of water balance. Calcium hardness and total alkalinity act as buffers to stabilize the pH. When they are properly adjusted, the pH will be stable and easy to maintain. The pH is a measure of the relative acidity and basicity of the water. The ideal pH range is 7.4 - 7.6. When the pH falls below 7.2, the water can become corrosive. Low pH can cause damage to metal in the control system and heater, excessive sanitizer consumption, and skin irritation. A pH above 7.8 can be scale-forming and allow metals or minerals in the water to form deposits and stain spa surfaces. pH above 7.8 can also cause eye and skin irritation.

Total Alkalinity

Alkalinity acts as a buffer to prevent the pH from changing as other substances are added to the water. Stability of the pH is directly related to the alkalinity. The alkalinity should be between 80 - 140 ppm. Alkalinity below 80 ppm makes it difficult to stabilize the pH. Alkalinity above 140 ppm may increase the pH and cause cloudy water, scaling, and decreased efficiency of the sanitizer.

Note: *Alkalinity Increaser & pH Increaser* and *Alkalinity & pH Decreaser* will affect both the pH and alkalinity. Generally, smaller additions will change the pH and have a very minor effect on the alkalinity. Larger additions will also affect the pH, but will have a much greater effect on the alkalinity. (Example: If the pH is very high and the alkalinity is within range, adding a few smaller doses of *pH and alkalinity Decreaser* instead of one large dose will reduce the pH with little effect on the alkalinity.)

Calcium Hardness

Do not use soft water in your spa. It is critical to have calcium in your water. The ideal range of calcium is between 150 – 250 ppm. The calcium hardness is normally adjusted when filling or refilling after draining the spa. High calcium levels can cause scale buildup on spa surfaces and equipment. Your spa can be protected against high calcium by using Metal & Stain Remover per the directions on the container. Low calcium levels can cause spa water to become highly corrosive and damaging to the equipment components and plumbing. To raise calcium levels, use Calcium Hardness Increase.

BALANCE

When initially filling or refilling your spa, follow these steps to achieve proper water balance.

IMPORTANT! Always follow instructions on the chemical container when adding chemicals.

1. Test the spa water using a test strip or test kit. Determine the pH and alkalinity of the water.
2. If adjustments are needed for the pH and/or alkalinity, always balance the alkalinity before balancing the pH. The product(s) you should use to adjust pH and/ or alkalinity are pH Increaser, Alkalinity Increaser or pH & Alkalinity Decreaser. Make any additions per the directions on the bottle and then test and repeat if necessary until all readings are in the desired range.
3. Increase the calcium hardness if necessary.

SHOCK

Initial Treatment

Shock the spa using granular Chlorine Sanitizer or non-chlorine Spa Shock. Add directly to the spa per the instructions on the container. For the initial treatment, Chlorine Sanitizer is preferred as it will also establish a residual of sanitizer. You may shock weekly using non-chlorine shock for low chlorine usage.

Maintenance Treatment

Once bacteria and other wastes are neutralized by the sanitizer, they stay in the water unless oxidized or shocked. Often called chloramines or bromamines, they create dull, cloudy water and can cause odor and eye or skin irritation. Shock treatment rids your spa of these wastes for clear, sparkling water. Shocking with non-chlorine Spa Shock or granular Chlorine Sanitizer is recommended once a week or whenever the water appears dull or cloudy or has a strong odor. Non-chlorine Spa Shock allows use of the spa 15 minutes after shock treatment. **NOTE:** A strong bromine or chlorine odor typically indicates the spa needs to be shocked – not that there is too much bromine or chlorine in the water.

SANITIZE

ConstantClean+ System (Optional)

The ConstantClean+ system utilizes a combination of sanitizers to increase water quality and significantly decrease maintenance. The combination of a In-Line Mineral Cartridge* and the factory installed ozonator greatly reduce the amount of sanitizer required. Instead of the normal 3 - 5 ppm of bromine, you may only need to maintain 1 - 2 ppm of bromine.

NOTE: The use of Spa Frog® or @ease floating cartridges is recommended. Do not use other floating chemical dispensers or Biguanide. Damage to the spa shell and other internal components can occur.

* The built-in sanitation system is not available in some international markets. However, the ozone system is available on all spa models in all countries. Please see your dealer for recommended alternative treatment method if the built-in sanitation system is not available.

BUILT-IN SANITATION SYSTEM*

After shocking the spa water with Chlorine Sanitizer granules or 1-Step Brominating Granules, bring the spa water to operating temperature. Then install the In-Line cartridges.

ADJUST THE MINERAL CARTRIDGE

Remove the protective cellophane wrap from the In-Line mineral cartridge. While holding the bottom of the cartridge, turn to the top until the number six appears in the setting window.

NOTE: The mineral cartridge should be replaced every three to four months. You will still feel the “spent” minerals inside, but they are no longer effective and the cartridge needs to be replaced. It is recommended to drain and refill the spa at the same time you replace the mineral cartridge.

ADJUST THE BROMINE OR CHLORINE CARTRIDGE

Remove the protective cellophane wrap from the Spa Frog® bromine or @ ease w/Smart Chlor cartridge. Finding the right setting for the sanitizer cartridge will require monitoring your usage for the first few weeks. Begin with an initial setting based on the chart below and monitor sanitizer levels daily for the first week or so, adjusting the cartridge by one setting per day until a 3 - 5 ppm level has been achieved. To adjust cartridge, remove from system and turn to the next highest setting if the sanitizer level is low or the next lower setting if the sanitizer level is high. The sanitizer cartridge needs to be replaced when empty between two and four weeks. Always maintain 3 - 5 ppm of bromine or chlorine. Suggested *Initial* Bromine or @ ease w/Smart Chlor Cartridge Settings

Daily filter time

Spa G9+9allons

	-250	250-300	300-400	400-500
One hour	2	2	3	4
Two hours 2	2	2	3	
Four hours 1	1	2	2	

IN-LINE SANITATION SYSTEM

Locate and remove the cartridge holder cap on the top lip of the spa. Push down and turn the holder counterclockwise to unlock. Lift holder out. Snap the Spa Frog® or @ease mineral cartridge into the area of the holder marked "MINERALS" (top portion), making sure to line up the indentation near the top of the cartridge with the raised line on the holder. Then snap the Spa Frog® bromine or chlorine cartridge into the area of the holder marked "BROMINE/CHLORINE". Be sure to line up the indentation on the cartridge with the raised line on the holder. After cartridges are snapped in, return the holder, push down, and then turn clockwise to lock into place. Replace the cap.

CAUTION: Hand-tighten only; avoid overtightening; avoid bending the holder to help prevent damage to the holder. Damage caused due to improper removal or installation of chemical cartridge holder is not covered under the warranty. Cartridge holder is warranted to be free from defects at time of delivery of spa. Chemical cartridge holders do not qualify for labor coverage. These parts can be purchased or exchanged under warranty at your authorized Marquis® dealer.

REMOVE THE CARTRIDGES

Reverse above procedures to remove cartridges.

*The built-in sanitation system is not available in some international markets. See your authorized Marquis® dealer for recommended alternate water treatment methods.

WATER CARE REGIMEN

Marquis SpaCare™ products are classified by easy to follow usage guidelines. The information below indicates whether the product should be used daily, weekly, monthly, when filling, or as needed – if special water conditions arise.

DAILY

Sanitizer

Maintain 1 - 2 ppm of bromine, @ease or chlorine at all times.

WEEKLY

Spa Shock

Sanitizer combines with bacteria and neutralizes sanitizer/bacteria on contact. However, the used sanitizer/bacteria particle is still present in the spa water. Used sanitizer in the water emits an odor and causes cloudy water. To oxidize, or rid the spa of this used sanitizer, you must shock the spa once a week. For best results, and to protect your spa cover leave the spa cover open for a minimum of 20 minutes after shocking the water.

NOTE: Additional shocking may be necessary if the spa is under heavy use. For @ease w/Smart Chlor (for use in the US only) you will only need to shock as needed or monthly.

AS NEEDED PRODUCTS

pH Increaser, Alkalinity Increaser

pH & Alkalinity Decreaser

These three products work to raise or lower the pH and alkalinity in the spa. They are only needed if the test strip indicates the levels are not in the ideal ranges.

Water Clarifier

Microscopic particles can pass through the spa filter and create cloudy water. The use of *Marquis SpaCare™ Water Clarifier* combines these microscopic particles into larger particles that can be trapped in the filter to clear cloudy water.

Spa Defoamer

If foam appears in your spa, the action of the jets will keep it from dissipating. The use of *Marquis SpaCare™ Spa Defoamer* instantly rids your spa water of foam.

Metal and Stain Remover

Metal and Stain Remover will assist in the reduction of metals such as iron and copper from spa water.

WATER CARE TROUBLESHOOTING GUIDE

NOTE: If you request a service call and no problem is found with the spa or the problem is not covered by warranty (i.e. chemical damage), you will be charged at the regular service rate.

P: Problem

S: Solution

Cloudy Water

P: Inadequate filtration or dirty filter.

S: Ensure that the filter is securely installed. Clean or replace filter.

Increase the length of clean up and/or filter cycles.

P: Water is not balanced.

S: Test water and adjust pH, alkalinity, and sanitizer as needed. Shock to oxidize and destroy organics in the water.

P: Unfiltered particles or chemically saturated.

S: Use Water Clarifier to combine particles.

P: High total dissolved solids

S: Drain, clean, and refill the spa.

WATER CARE TROUBLESHOOTING GUIDE

Chemical Odor

- P: Too many chloramines/bromamines in the water.
- S: Treat water with Spa Shock, then adjust sanitizer level as necessary.
- P: Dull looking water, difficult to manage. High total dissolved solids (TDS) may be the cause.
- S: Drain, clean and refill with fresh water.

Musty Odor

- P: Not enough sanitizer in water – bacteria or algae in water.
- S: Add sanitizer as necessary and shock. Readjust sanitizer level if necessary.

Yellow Water

- P: Low pH and/or low alkalinity.
- S: Test and adjust pH with pH and Alkalinity Increase. Adjust alkalinity if necessary.

Foaming

- P: High concentration of body oils, lotions or soaps, as well as excessive organics.
- S: Use Spa Defoamer and adjust pH and sanitizer as needed.

Scum Line in Spa

- P: Body oils and dirt.
- S: Use Glove Sponge to clean the spa. Test and adjust the sanitizer

No Sanitizer Reading

- P: Sanitizer level is too low.
- S: Shock and/or adjust sanitizer cartridge until the sanitizer registers in the recommended range.

- P: Test strip remains “white” even after sanitizer has been added.
- S: Sanitizer level could be extremely high. It can bleach the reagents on the test strip and give a false reading. Remove spa cover and activate jets and air control. Allow jets to run for 30 minutes. Test water to see if desired level has been reached. Adjust sanitizer cartridge to reduce bromine or chlorine level.

High Sanitizer Reading

- P: Too much chlorine or bromine added or dispensed into the spa.
- S: Remove spa cover and activate jets and air control. Allow jets to run for 30 minutes. Test water to see if desired level has been reached. Adjust sanitizer cartridge to reduce bromine or chlorine level.

Eye or Skin Irritation

- P: Contaminants or excessive amount of chloramines/bromamines in water.
- S: Treat water with Spa Shock. Adjust sanitizer level.
- P: pH is low.
- S: Adjust as needed.

Corrosion of Metal

- P: Low pH.
- S: Adjust pH with pH and Alkalinity Increase.

Green Water/Algae

- P: Low sanitizer level or high pH.
- S: Adjust pH, shock and/or adjust sanitizer cartridge as necessary.


Erratic pH

- P: Alkalinity and/or calcium hardness are too low causing pH "bounce".
- S: Test and adjust alkalinity and/or calcium hardness to bring them into the ideal range.


MARQUIS ELITE STEP & BENCH INSTALLATION (OPTION)

The Marquis Elite step and mounting brackets may be placed along a straight side of the spa, most often centered to the entry location.


Find the center of the spa side where you want to mount the step. Measure 27.5" (699mm) center spread and mark. Measure 1" (25mm) up from base and mark (see diagram).



1




2



3

- With step mounting brackets facing outwards mark the two holes.
- Using the bracket as a guide, predrill two holes per bracket.
- Attach the left and right brackets to the spa exterior base (#1).
- The step hardware is factory-installed. Loosen the thumbscrew. Gently push step towards the spa until the brackets and hardware engage (#2).
- Tighten the thumbscrew to attach the step to the spa exterior (#3).

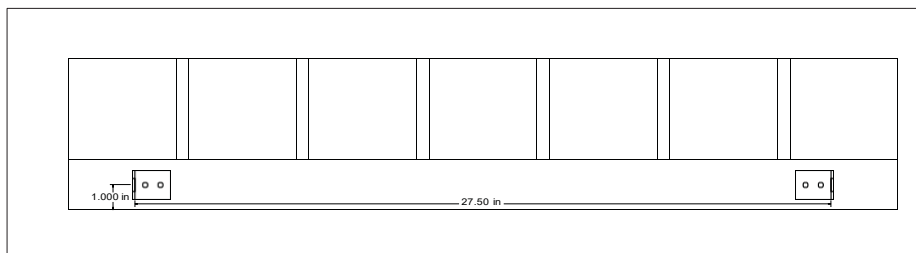

All steps can be inherently dangerous. Always use caution in stepping in and out of your spa.

OWNER'S PROTECTION PLAN

WHAT THE MARQUIS CORP. LIMITED WARRANTY COVERS

What the Marquis Corp. Limited Warranty Covers
Marquis Corp. warrants that our products will be free from defects in materials and workmanship for the term set forth exclusively in this warranty. Accessories purchased from Marquis Corp. or a Marquis Corp. authorized Marquis® dealer and added to the spa after manufacture of the spa are not covered under this warranty but may have other warranties. Refer to owner's manual for proper use, maintenance and installation of your spa. The Marquis® Limited Warranty, provided by this Owner's Protection Plan, is made only to the original purchaser of the spa and is not transferable.

10 YEAR STRUCTURE

7 YEAR SURFACE

The reinforced structure is warranted for **10 years** not to leak. Fittings and attachments are not included.

5 YEAR PLUMBING

The acrylic surface is warranted for **seven years** against blisters, cracks and delamination. The use of a non-Marquis® Weathershield™ cover will void this warranty.

5 YEAR EQUIPMENT

Plumbing and fittings are warranted against water loss for **five years**. Warranty coverage does not include gaskets or seals.

5 YEAR EXTERIOR

Electronic equipment is warranted against defects in materials and workmanship for **five years**. Equipment includes PC boards, pumps, control panels, heater and heat sensors. MicroSilk® system and associated components has a **three year parts** and labor warranty. Audio system and associated components have a separate warranty.

The synthetic skirt and DuraBase™ exterior are warranted against cracking and peeling for **five years**. All Panels are covered under a two year limited warranty, beginning on the date of manufacture.

2 YEAR COMPONENTS

The ozonator is warranted against defects in material and workmanship for **two years**.

OWNER'S PROTECTION PLAN

1 YEAR PARTS

LED lights, valves, spa cover, jet inserts, in-line sanitation system and overlays are covered for one year. These parts do not qualify for labor coverage under this warranty.

Fuses, filter, filter lid, cushioned headrests, chemical cartridge holders and other items not specifically mentioned in this warranty are warranted to be free from defects in materials and workmanship at time of delivery.

The audio and audio components have a one-year warranty and includes parts and labor.

OWNER'S PROTECTION PLAN

Please take a moment to register your warranty. You can register online at <http://www.marquisspas.com>, click on owner login or mail in the warranty registration card attached to this manual. For warranty information outside of the USA and Canada, please refer to your country's Marquis Spas™ Distributor. Your first resource for warranty work, questions or claims is through the factory authorized Marquis Spas dealer you purchased the product from. Your dealer will support you for the life of your product and will have the best recommendation for service, water care, maintenance and repairs.

General provisions applicable to all parts covered by this warranty.

1. The spa must be set on a solid level surface that is sufficient to support the entire length and width of the spa. Standard building practices must be followed. Damage caused by failure to have a leveled and supported foundation under the spa is not covered under warranty. The manufacturer does not warrant problems associated with prolonged exposure to the sun and/or use of any sanitization or ozone system not approved by the manufacturer.
2. Any alteration to any system, either electrical, plumbing, or mechanical, or overuse of chemicals, or any other problems caused by external sources are not covered under warranty. Other exclusions may apply, see limitations for details.
3. Damage caused by acts of nature, poor water chemistry, and/or improper maintenance will not be covered under this warranty. Alterations or replacements of components installed in the spa that are not purchased and/or approved by the MANUFACTURER, including incorrect wiring, will terminate the complete spa warranty.
4. The warranty period starts on either the day of delivery to the customer or eighteen (18) months from the date of manufacturing, whichever date comes first.

PERFORMANCE

In the event of any defect covered by this LIMITED warranty, a Marquis, authorized agent will correct such defect within the terms and conditions contained herein. There will be no charge for parts or labor within the

above terms. However, travel charges that occur will not be covered under terms and conditions by the warranty. If it is determined by May

Marquis Spas that the repair of the product is not feasible, a replacement spa equal to the value of the original purchase price will be provided. Cost for removal of the defective spa and delivery and installation of the replacement spa is the responsibility of the homeowner and will not under any circumstances be covered by Marquis Spas™.

LIMITATIONS

This warranty is void if this spa has been subjected to alteration, misuse, or repairs have been performed by anyone other than an authorized agent of Marquis Spas. Misuse or abuse is defined as: use of the spa in a nonresidential application, water temperature outside the range of 32 °F to 110 °F, damage caused by clogged or dirty filter cartridges, damage to the spa from an absence of a hard cover, damage to components from improper pH, use of any type of acid, or from chemical imbalance. ACTS OF NATURE are not covered under this warranty. NOTE: Warranty on 50 Hz spas excludes labor. (Outside US and Canada)

DISCLAIMERS

There are no additional warranties, express or implied, which extend beyond the terms of this limited warranty. Marquis Corp. makes no warranty on the merchantability of the goods or the fitness of the goods for a particular purpose.

No other person or entity has been authorized to make any warranty, representation or promise of performance not included in this express written warranty, and Marquis Corp. shall not be bound by any such additional warranty, representation or promise.

This warranty gives you specific legal rights. You may also have other rights that may vary from state to state.



Marquis is a registered trademark of Marquis Hot Tubs, LLC. Marquis reserves the rights to make product modifications and enhancements.

MarquisSpas.com

